

A11100 996104

NAT'L INST OF STANDARDS & TECH R.I.C.



A1100996104

NBS building science series
A435 .U58 V114:1978 C.1 NBS-PUB-C 1974

TA
435
.U58
NO.114
1978
C.2

NBS BUILDING SCIENCE SERIES 114

The Effect of "Resource Impact Factors" on Energy Conservation Standards for Buildings



U.S. DEPARTMENT OF COMMERCE • NATIONAL BUREAU OF STANDARDS

NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards¹ was established by an act of Congress March 3, 1901. The Bureau's overall goal is to strengthen and advance the Nation's science and technology and facilitate their effective application for public benefit. To this end, the Bureau conducts research and provides: (1) a basis for the Nation's physical measurement system, (2) scientific and technological services for industry and government, (3) a technical basis for equity in trade, and (4) technical services to promote public safety. The Bureau's technical work is performed by the National Measurement Laboratory, the National Engineering Laboratory, and the Institute for Computer Sciences and Technology.

THE NATIONAL MEASUREMENT LABORATORY provides the national system of physical and chemical and materials measurement; coordinates the system with measurement systems of other nations and furnishes essential services leading to accurate and uniform physical and chemical measurement throughout the Nation's scientific community, industry, and commerce; conducts materials research leading to improved methods of measurement, standards, and data on the properties of materials needed by industry, commerce, educational institutions, and Government; provides advisory and research services to other Government Agencies; develops, produces, and distributes Standard Reference Materials; and provides calibration services. The Laboratory consists of the following centers:

Absolute Physical Quantities² — Radiation Research — Thermodynamics and Molecular Science — Analytical Chemistry — Materials Science.

THE NATIONAL ENGINEERING LABORATORY provides technology and technical services to users in the public and private sectors to address national needs and to solve national problems in the public interest; conducts research in engineering and applied science in support of objectives in these efforts; builds and maintains competence in the necessary disciplines required to carry out this research and technical service; develops engineering data and measurement capabilities; provides engineering measurement traceability services; develops test methods and proposes engineering standards and code changes; develops and proposes new engineering practices; and develops and improves mechanisms to transfer results of its research to the ultimate user. The Laboratory consists of the following centers:

Applied Mathematics — Electronics and Electrical Engineering² — Mechanical Engineering and Process Technology² — Building Technology — Fire Research — Consumer Product Technology — Field Methods.

THE INSTITUTE FOR COMPUTER SCIENCES AND TECHNOLOGY conducts research and provides scientific and technical services to aid Federal Agencies in the selection, acquisition, application, and use of computer technology to improve effectiveness and economy in Government operations in accordance with Public Law 89-306 (40 U.S.C. 759), relevant Executive Orders, and other directives; carries out this mission by managing the Federal Information Processing Standards Program, developing Federal ADP standards guidelines, and managing Federal participation in ADP voluntary standardization activities; provides scientific and technological advisory services and assistance to Federal Agencies; and provides the technical foundation for computer-related policies of the Federal Government. The Institute consists of the following divisions:

Systems and Software — Computer Systems Engineering — Information Technology.

¹Headquarters and Laboratories at Gaithersburg, Maryland, unless otherwise noted; mailing address Washington, D.C. 20234.

²Some divisions within the center are located at Boulder, Colorado, 80303.

The National Bureau of Standards was reorganized, effective April 9, 1978.

OCT 31 1978

NBS BUILDING SCIENCE SERIES 114**The Effect of "Resource Impact Factors"
on Energy Conservation Standards
for Buildings**

Stephen F. Weber

Center for Building Technology
National Engineering Laboratory
National Bureau of Standards
Washington, D.C. 20234

Sponsored by the

Department of Energy
Washington, D.C. 20545



U.S. DEPARTMENT OF COMMERCE, Juanita M. Kreps, Secretary

Dr. Sidney Harman, Under Secretary

Jordan J. Baruch, Assistant Secretary for Science and Technology

NATIONAL BUREAU OF STANDARDS, Ernest Ambler, Director

Issued September 1978

Library of Congress Cataloging in Publication Data

Weber, Stephen F.

The effect of "resource impact factors" on energy conservation standards for buildings.

(National Bureau of Standards building science series ; 114)

"Supersedes NBSIR 77-1199."

Supt. of Docs. no.: C13.29/2:114

1. Buildings--energy conservation. I. United States. Dept. of Energy. II. Title. III. Series: United States. National Bureau of Standards. Building science series ; 114.

TA435.U58 no. 114 [T]163.5.B84] 690'.21s 696 78-606072

National Bureau of Standards Building Science Series 114

Nat. Bur. Stand. (U.S.), Bldg. Sci. Ser. 114, 55 pages (Sept. 1978)

CODEN: BSSNBV

Supersedes NBSIR 77-1199

U.S. GOVERNMENT PRINTING OFFICE
WASHINGTON: 1978

For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402

Stock No. 003-003-01952-6 Price \$2.30

(Add 25 percent additional for other than U.S. mailing).

PREFACE

The first phase of this research was funded by the Federal Energy Administration (FEA), and the review and revision process leading to this final report was funded by the Energy Research and Development Administration. The functions of both of these former agencies now reside in the Department of Energy (DOE). This work is in support of the DOE/NBS research program entitled "Building Energy Conservation Criteria," whose broad objective is to facilitate the development and promulgation of energy conservation performance standards for the design and evaluation of buildings. The performance criteria being investigated under this program are expected to take energy values into account. This study addresses the question of whether the energy values used in developing standards based on these criteria should be the actual market prices paid or a value which has been adjusted to reflect the total value to the nation of the energy saved. This total value of energy can be represented by a system of multiplicative factors called "Resource Impact Factors" (RIF's) applied to the market prices of energy. This report assesses the effect of using RIF's on the design energy consumption to be incorporated into performance standards and on the economic efficiency of such standards.

The Applied Economics Program of the Center for Building Technology, National Engineering Laboratory, National Bureau of Standards, has prepared this report to provide those involved in the development of energy conservation standards with some guidance in determining what factors are appropriate to be included in RIF's, how such RIF's can be integrated into the actual standards development process, and how the use of such RIF's would affect the standards being developed.

Dr. Harold E. Marshall, Chief of the Applied Economics Program, and Stephen R. Petersen deserve special thanks for the time they spent discussing these issues, reading and commenting on the several drafts of this report, and providing the author with invaluable insights and ideas. The author is also grateful for the helpful comments and suggestions of the NBS reviewers, Robert R. Jones, William L. Carroll, John D. Ryan, Jim L. Heldenbrand, Dr. Douglas R. Shier, and Dr. Carl O. Muehlhause, as well as of all those who participated in the public review of the earlier version of this report, NBSIR 77-1199 (R). Thanks are also due to Noreen Rigopoulos, Linda Sacchet, and Carol Thompson who typed the several drafts of this report, as well as to Reid Hartsell and James F. Shivar, the general technical representatives for FEA and DOE. Responsibility for any errors and shortcomings that remain rests solely with the author.

Cover: Energy conservation standards based on Resource Impact Factors could reduce the lifetime energy consumption of new buildings.

ABSTRACT

This report addresses the question of the proper value for energy to be used in the development of optimum (i.e., cost-effective) energy conservation performance standards for buildings. This study finds that the appropriate value for energy is its social value, which should be determined through the development and application of Resource Impact Factors (RIF's). Some guidelines are provided for the formulation and development of RIF's. A life-cycle cost minimization model for determining the optimum conservation standard is employed to show how the use of RIF's would generally lower the maximum allowable energy consumption specified in the standard. Indeed, it is found that the higher the RIF value, the lower the energy consumption allowed by the standard, although this effect steadily diminishes as the RIF value increases. Moreover, the additional energy savings resulting from using RIF's are shown to increase as the severity of the climate increases. When two important restrictive assumptions of the model are relaxed, these same relationships between energy consumption and the RIF value on the one hand, and between the extra energy savings due to RIF's and the climate on the other hand, are both maintained. Finally, geometric and algebraic measures are derived for the net gain in economic efficiency that would result from using RIF's in developing energy conservation performance standards.

Key words: Building economics; economics; economic efficiency; energy; energy conservation; life-cycle cost; optimization; performance standards; resources; resource impact factors; social optimum; standards.

CONTENTS

	Page
PREFACE.....	iii
ABSTRACT.....	iv
EXECUTIVE SUMMARY.....	1
1. INTRODUCTION.....	5
1.1 PURPOSE.....	5
1.2 ENERGY CONSERVATION STANDARDS FOR BUILDINGS.....	6
1.2.1 Types of Standards.....	6
1.2.2 Legislation.....	6
1.2.3 ASHRAE Standard 90-75.....	7
1.3 APPROACH AND ORGANIZATION.....	8
2. CONCEPTUAL FRAMEWORK FOR AN OPTIMUM STANDARD.....	11
2.1 OPTIMUM STANDARDS FROM THE PRIVATE PERSPECTIVE.....	12
2.1.1 Life-Cycle Cost Minimization.....	12
2.1.2 Value Differentiation among Energy Types.....	13
2.2 OPTIMUM STANDARDS FROM THE SOCIAL PERSPECTIVE.....	13
3. RIF's IN AN OPTIMUM STANDARD DETERMINATION MODEL.....	19
3.1 ALTERNATIVE FORMULATIONS FOR RIF's.....	19
3.1.1 Quantity Multiplier Formulation.....	20
3.1.2 Price Multiplier Formulation.....	21
3.2 AN OPTIMUM STANDARD DETERMINATION MODEL.....	21
3.2.1 Derivation of the Model.....	22
3.2.2 Significance of the Model.....	22
3.3 APPLICATION OF PRICE MULTIPLIER RIF's.....	23
3.4 LIMITATIONS OF THE ANALYSIS.....	24
4. THE OPTIMUM STANDARDS MODEL GENERALIZED.....	27
4.1 ALTERNATIVE COST FUNCTIONS.....	28
4.1.1 Case I: A Linear Cost Function.....	28
4.1.2 Case II: A Quadratic Cost Function.....	29
4.1.3 Case III: Higher-Order Cost Functions.....	30
4.1.4 Comparison of Alternative Cost Functions.....	31
4.2 DEGREE DAYS AS A FUNCTION OF RESISTANCE.....	32
4.2.1 Degree-Day Temperature Base and Resistance.....	33
4.2.2 Degree Days and the Degree-Day Base.....	34
4.2.3 Case IV: A Quadratic Degree-Day Function.....	34
4.3 CASE V: THE GENERAL OPTIMUM STANDARDS MODEL.....	36
5. SUMMARY, CONCLUSIONS AND FURTHER RESEARCH.....	39
5.1 SUMMARY.....	39
5.2 CONCLUSIONS.....	40
5.2.1 Proper Formulation of RIF's.....	40
5.2.2 The Energy Consumption Effect.....	40
5.2.3 The Economic Efficiency Effect.....	41
5.3 SUGGESTIONS FOR FURTHER RESEARCH.....	42
REFERENCES.....	43
APPENDIX: ECONOMIC EFFICIENCY EFFECTS OF RIF'S.....	44
A.1 A GEOMETRIC MEASURE OF ECONOMIC EFFICIENCY.....	44
A.2 AN ALGEBRAIC MEASURE OF ECONOMIC EFFICIENCY.....	47

Figures

	Page
Fig. 2.1 Competitive Market for a Resource.....	14
Fig. 2.2 Effects of a Unit Tax	15
Fig. 2.3 Social Costs of Coal-Fired Electric Power.....	16
Fig. 2.4 Regulation of the Natural Gas Price.....	17
Fig. 3.1 Plot of the Ratio of Socially to Privately Optimum Standards as a Function of the RIF Value.....	25
Fig. 4.1 Degree Days as a Function of Thermal Resistance for a Typical House in Washington, D.C.....	35
Fig. A.1 Trade-off Curve between Energy Consumption and Thermal Resistance for Given Climate and Indoor Temperature.....	44
Fig. A.2 Privately Optimum Energy Consumption Rate (A_o)	45
Fig. A.3 Socially Optimum Energy Consumption Rate (A_o^*) and the Net Efficiency Gain from Using RIF's ($N-M$).....	46

Tables

	Page
Table 3.1 Hypothetical Quantity Multiplier RIF's.....	20
Table 3.2 Hypothetical Price Multiplier RIF's	21
Table 3.3 Possible RIF Values with Corresponding Ratios of Socially to Privately Optimum Standards.....	24
Table 3.4 Selected RIF Values with Corresponding First Derivatives of U_o^*	24
Table 4.1 Ratios of Socially Optimum to Privately Optimum Standards for Various RIF Values and Cost Functions.....	31
Table 4.2 Ratios of Extra Energy Savings Due to RIF's in Colder Versus Warmer Climates, for Various Cost Functions.....	32
Table 4.3 Effective Balance Points for Various Levels of Thermal Resistance: Hypothetical Example	33
Table 4.4 Degree Days Corresponding to Various Balance Points for Six Major U.S. Cities	34
Table 4.5 Restrictions on the First and Second Derivatives of $D(R)$ and $C(R)$	36
Table A.1 Conversion Factors from Customary to Metric (SI) Units	48

Facing page: Standards for energy conservation would apply to new high-rise apartment buildings.



EXECUTIVE SUMMARY

This report focuses on the role which the value of energy is expected to play in the development of optimum (i.e., cost-effective) energy conservation performance standards for new buildings. The maximum rate of energy consumption allowed under the optimum standard is based on a comparison of the value of the energy saved relative to the cost of complying with the standard over the life cycle of the building. Thus, the method used to value the energy saved has a significant effect on the resulting standard. If the standard is to be set at a level which is socially optimum, then it must be based on the social value of

energy. Because of a range of price-distorting factors in energy markets, however, it is unlikely that the actual prices paid for various energy types accurately reflect the true social values of these resources. For developing optimum energy conservation standards, the social values of energy can be represented by applying a system of indices called "Resource Impact Factors" (RIF's) to the actual energy prices. One of the purposes of this report is to offer some guidelines for the development of such a system. The other major purpose of this report is to assess the effects of using a system of RIF's in the development of energy

conservation standards. To accomplish this latter goal, a comparison is made between a standard that is optimum from the private point of view (using the actual unadjusted prices paid for energy) and one that is optimum from the social point of view (using prices adjusted with RIF values). The comparison is made in terms of two implications of the standards: (1) the relative amounts of energy saved; and (2) the relative economic efficiencies of the standards.

The guidelines offered for developing RIF's fall into two categories. The first concerns the explicit method of formulation. One method of formulation, as a quantity multiplier, results in impact numbers which would serve well to compare alternative energy types. Because these impact numbers are not denominated in dollar terms, however, they would be inappropriate for determining the economic balance between energy and nonenergy resources. To achieve such a balance, a common basis is needed to allow comparison between the value of the energy saved and the cost of the resources expended to save it. The other method of formulation, as a price multiplier, provides this common denominator because the RIF value converts the actual price paid for the energy to its corresponding social value. Since this social value is denominated in dollars, it can be compared with the cost of the nonenergy resources.

The second category of guidelines relates to the factors which RIF's should take into account. These are the same factors that cause a divergence between the actual price and the social value of energy. These factors include the presence of unit taxes or of monopoly power, environmental effects of energy production or consumption, the desire for national economic independence, the existence of price controls such as those on natural gas, and inadequate information about the long-run scarcity of exhaustible energy resources.

To assess the likely effect on energy consumption resulting from the use of RIF's, several forms of a life-cycle cost minimization model are employed. The present value of total life-cycle heating-related costs is expressed as a function of the thermal resistance of the building envelope. This cost expression is minimized to find the economically optimum (i.e., most cost-effective) level of thermal resistance. Because of the exactly inverse relationship between resistance and the rate of heat flow conducted through the building envelope, this model also yields a formula for the economically optimum rate of thermal transmission, which forms the basis for the optimum performance standard itself. Since the actual price paid for energy is used in this formula, the resulting rate of thermal transmission is considered privately optimum. Moreover, it is possible to introduce price multiplier RIF's into this formula in order to determine the

socially optimum rate of transmission. Thus, the socially optimum rate (using RIF's) can be compared with the privately optimum rate (without RIF's). The comparison is made for the alternative forms of the model which result from varying the assumptions regarding the cost of resistance and effective degree days.

In general, it is found that the introduction of RIF's would have a restraining influence on the energy consumption ceiling allowed under the conservation performance standard, assuming the most probable range for the price multiplier RIF values: $RIF > 1$ (that is, the social value is greater than the actual price paid for energy). Using the example of natural gas, rough estimates can be made of the additional energy savings resulting from the use of RIF's. A comparison of domestic with imported gas prices is used to derive high and low RIF values. Introducing the resulting RIF values of 2.9 and 1.5 into the expression for the socially optimum standard, we find that the energy consumption ceiling allowed under the standard would be 41.3 percent and 18.4 percent lower, respectively, with RIF's than without them. The model also shows that in general the higher the RIF value introduced (that is, the higher the ratio of social value to actual price) for an energy type, the lower the energy consumption ceiling allowed by the standard, although this effect steadily diminishes as the RIF value increases. Moreover, the additional energy savings resulting from using RIF's are shown to increase as the severity of the climate increases. When the restrictive assumptions regarding degree days and the cost of thermal resistance are relaxed, these same relationships between energy consumption and the RIF value on the one hand, and between the extra energy savings due to RIF's and the climate on the other hand, are both maintained.

Regarding the efficiency effect of RIF's, it turns out that the introduction of RIF's increases the economic efficiency of the resulting energy conservation standard. A standard developed without RIF's is in effect based on the actual private prices paid for energy, whereas to assure a socially optimum standard, the appropriate prices to use are the social values of the energy types (that is, the product of the private prices times the corresponding RIF values). Using the private rather than the social prices of energy will likely result in a standard that is not socially optimum. This deviation of the privately optimum from the socially optimum standard can be termed economically inefficient in the sense that an opportunity for a net economic gain to society is being foregone. That is, the use of a RIF value greater than one will generally lead to an additional reduction in energy consumption whose social value exceeds the cost of the additional thermal resistance required to

achieve it. This net gain in economic efficiency (the social value of the additional energy savings less the cost of achieving them) which results from the use of RIF's is depicted graphically, and geometric and algebraic measures of its magnitude are developed in the Appendix.

One important area requiring further research concerns the actual development of empirical estimates for RIF's. Those factors preventing the actual price from reflecting the social value need to be modeled more realistically and accurately. These models must be applied to derive empirical estimates for each type of price-distorting factor. Then, a method must be found to combine these individual factors into an overall RIF value.

The other important area for further research is that of the relationship of RIF's to building (rather than component) performance standards. This type of analysis would take into account the many energy-flow interactions which occur among the various components of a building, rather than study each component in isolation. With Department of Energy funding, researchers at NBS are currently developing such a model for determining optimum building performance criteria. Once this model has been completed, the effect of using RIF's in determining socially optimum building performance standards can be assessed.

Facing page: *Polystyrene sheathing applied to these townhouses helps reduce heat flow through exterior walls.*



1. INTRODUCTION

1.1 PURPOSE

The focus of this report is on the role of energy values in the development of optimum (i.e., cost-effective) energy conservation standards for buildings. It is expected that the value of energy used in the standards development process will influence the energy consumption allowed under such an optimum standard. This study assesses the effect on the conservation standard of using "adjusted" values rather than actual market prices for energy. The purpose of the

adjustment is to ensure that the energy values on which the standard is based accurately reflect the true social values of the energy resources to be used in the building. In developing an optimum standard, the social values of energy can be represented by applying a system of multiplicative factors called "Resource Impact Factors" (RIF's) to the actual prices paid for energy.

This report compares an energy conservation standard developed using actual market prices of energy with

one developed using social values of energy. Thus, a standard that is optimum in private profitability terms is compared with one that is optimum from a social perspective. The comparison is made in terms of two implications of the standards: (1) the relative amounts of energy saved, and (2) the relative economic efficiencies of the standards.

In addition, the report will discuss the manner in which RIF's should be specified in order to be useful in the development of optimum energy conservation standards for buildings. Moreover, there will be some discussion of the need for RIF's and of the various factors which will require quantification before usable RIF's can be developed. These factors are the main causes for the failure of actual market prices to reflect the true social values of energy resources.

1.2 ENERGY CONSERVATION STANDARDS FOR BUILDINGS

1.2.1 Types of Standards

There are three fundamental types of energy conservation standards which could be developed for buildings. The first is a prescriptive standard which might specify the kind and amount of insulating materials to be used in the walls and attic of a particular type of building. Another kind of standard is a component performance standard, which would only require that a component be able to meet a particular goal or target specification without regard to how that goal is achieved. An example of such a standard would be a requirement that the attic have an overall coefficient of heat transmission (or U value) of less than 0.06 Btu/hr./sq.ft./°F.¹ The third type is a building performance standard, which would specify an overall goal for the design energy consumption of the building, thus allowing the designer to make cost-reducing trade-offs between building components in order to conform to the standard. For example, a building performance standard might require that the amount of energy needed to satisfy the annual heating and cooling load be less than 60,000 Btu per square foot of floor space. This is referred to as the allowable "annual energy budget" for heating and cooling. Another building performance standard might impose an upper limit on the annual energy consumption for domestic hot water.

¹ Because of the present accepted practice in this country for building technology, customary U.S. units of measurement are used throughout this report. Relevant conversion factors from customary to metric (SI) units can be found in table A.1 at the end of the Appendix.

1.2.2 Legislation

On August 14, 1976, the Energy Conservation and Production Act (P.L. 94-385) was signed into law. Title III of this law, the Energy Conservation Standards for New Buildings Act of 1976, called for the Secretary of Housing and Urban Development (HUD) to develop energy conservation performance standards for new residential and commercial buildings within three years. In his April 20, 1977 Energy Message to the Joint Session of Congress, President Carter accelerated this program schedule by one year. On August 4, 1977, Section 304 of the Department of Energy Organization Act (P.L. 95-91) transferred responsibility for the development and promulgation of these standards to this new Department. The responsibility for implementing the standards has remained with HUD.

Key elements of this energy conservation standards legislation are: (1) the explicit specification of *performance* rather than *prescriptive* standards; (2) the requirement that the standards developed be analyzed in terms of their economic costs and benefits; (3) the stated goal of achieving the *maximum practicable* improvements in energy efficiency through reasonable conservation features; (4) the requirement that the standards take into account the climatic variations among different regions of the country; (5) the avowed purpose of encouraging greater use of nondepletable sources of energy; and (6) that the standard apply to the heating, cooling, ventilating, and domestic hot water loads of buildings.

The fact that performance standards are to be developed means that designers will be free to choose the most economical means of meeting the standards, given regional variations in the costs of building materials and labor. From the legislative hearings, it appears that standards of the building performance type are the ultimate goal of the legislation. These building performance standards are expected to be developed by combining the results of analysis of individual components and their energy interdependencies.

The second key element of the legislation, the need to consider costs and benefits, points out the importance of developing an economically balanced conservation standard. This requirement seems to suggest that the value of the total energy saved by the standard should at least cover the extra costs imposed by the standard. A further guideline for developing the standard, or future improved versions of it, may be implicit in this requirement. That is, that the standard be set so as to achieve the greatest possible net economic gain, taking into account both savings and costs. Such a standard could be considered economically optimum.

The goal of maximum practicable gains in energy efficiency requires that the standard provide for the most energy savings possible within the limits of practicability. This suggests that the operating constraint preventing an extremely stringent standard is the increased cost required for compliance. According to this interpretation, the standard would be made increasingly stringent as long as the additional energy savings still justify the extra costs. In this way, cost-effective energy conservation features would be introduced into the design of buildings. Likewise, such a cost-effective standard would directly address the expressed concern of Congress over excessive long-term operating costs due to inadequate energy conservation measures in new buildings.

The concern for cost effectiveness is also apparent in the fourth element of the legislation, the requirement to consider climatic variations in developing the standard. The reason for considering these variations is so that the standard can be tailored to the specific heating and cooling loads of each region. The dollar-value benefit of the energy saved by one additional inch of attic insulation is greater in more severe climates. Thus, these higher levels of benefits will tend to justify the extra cost of complying with more stringent performance standards developed for more severe climates.

The fifth key element of the legislation, the desire to encourage greater use of nondepletable resources, is especially relevant to this report. We will show how RIF's can be used in the development of performance standards which are optimum from the social point of view. Properly designed RIF's will take into account the policy preferences of society, which could easily include the goal of fostering the development and use of nondepletable resources.

The sixth key element concerns which energy loads will have standards. Those loads specifically mentioned in the Act are for heating, cooling, ventilating, and domestic hot water services. It is likely, however, that standards will be developed for illumination loads as well. Of these energy loads, heating and cooling are the ones most affected by the design of commercial and residential buildings. Hence, a wider range of trade-offs is possible between heating and cooling loads and building design decisions. For this reason, we have chosen to concentrate our analysis on the development of energy conservation performance standards for the heating and cooling of buildings.

1.2.3 ASHRAE Standard 90-75

An energy conservation standard for buildings has already been developed and is being proposed by the American Society of Heating, Refrigerating, and Air-

Conditioning Engineers (ASHRAE). This is ASHRAE Standard 90-75 and is entitled, "Energy Conservation in New Building Design." This standard serves as the basis for energy conservation regulation in several states as well as for the formulation of energy conservation provisions of three model codes. For purposes of comparison it is worth noting how it differs from the standard called for by the Energy Conservation and Production Act.

Contrast with legislation: The major point of difference between these two standards regards the method of establishing the appropriate degree of stringency. ASHRAE 90-75 did not attempt to achieve the maximum practicable improvements in energy efficiency as called for by the Energy Conservation and Production Act. Indeed, the ASHRAE standard specifically states that it is presenting only *minimum* requirements.² Moreover, the degree of stringency embodied in the ASHRAE standard does not seem to be based on economic considerations. By contrast, as we have seen, the language of the Energy Act suggests that the standards developed should be based on a balancing of costs and benefits.

Another less significant point of difference between these two standards lies in the relative emphasis placed on component versus building performance. Most of the text of the ASHRAE standard uses the component performance approach. Sections 4 through 9 specify performance standards for the various building components such as the exterior envelope, heating and cooling equipment, service water heating, and lighting. Only in the rather brief section 10 is a systems analysis approach suggested as an acceptable alternative to the component standards. In other words, deviations from the specific component standards are allowed as long as the entire building's annual energy performance is shown to be superior to that of a comparable building which does conform to the component standards. The Energy Conservation and Production Act, on the other hand, has building performance standards as its ultimate goal, although these are expected to be based initially on the analysis of individual components and may be complied with mainly through manuals of accepted practice.

Resource Utilization Factors and Resource Impact Factors: The proposed section 12 of ASHRAE 90-75, "Annual Fuel and Energy Resource Determination," provides a method for calculating the equivalent

² ASHRAE 90-75: *Energy Conservation in New Building Design* (New York: ASHRAE, Inc., 1975), Section 4.2.1.

resource quantities required to supply the energy needs of a building.³ The procedure involves the use of conversion coefficients, called Resource Utilization Factors (RUF's), to be applied to the required energy output delivered to the building site. These RUF's are based on the total energy losses that result from processing, refining, transporting, converting, and delivering the energy from the point of extraction to the building site.

The rationale behind the development of RUF's as distinct from RIF's is to treat separately those factors which are more readily quantifiable. This is because these factors are basically technical in nature. The less manageable factors, such as environmental, economic, and national security concerns, are to be accounted for by developing a system of RIF's, an analogous kind of energy quantity multiplier. The format for annual fuel and energy calculations presented in section 12 of ASHRAE 90-75 suggests that the RIF's are to be applied after and in addition to the RUF's, so that the total resource impact of each energy load can be determined.⁴

This approach has several shortcomings. In the first place, RUF's do not take into account the energy expended in extracting the resource from the ground. Secondly, this use of RUF's is similar to relying solely on the technique known as Net Energy Analysis. According to this technique, resources to be employed in the production of energy for consumer use should be so allocated as to maximize "net energy." In this context net energy means the amount of energy that remains for consumer use after the energy costs of finding, developing, extracting, upgrading, and delivering the energy have been paid. These energy costs are measured by the energy content of the resources (i.e., by the amount of energy required to produce them) which are employed in carrying out these processes. Exclusive reliance on Net Energy Analysis incorrectly implies that all nonenergy resources are relevant only in the measure of the energy required to produce them. Thus, many

important resources are either totally or partially ignored.⁵

Another difficulty with this distinction between RIF's and RUF's is that it involves a certain amount of double counting. This occurs because all of the elements included in RUF's also affect the economic cost (which is included in RIF's) of making the energy available to serve the building's needs. For example, an increase in refining efficiency resulting from a decrease in energy losses at the refining stage would cause a reduction in the corresponding RUF value. At the same time, however, this change in efficiency would also be reflected in a lowering of the effective cost of delivering energy to a building project site.

In this report, we suggest an alternative method of formulating RIF's—one which combines all those factors not included in the market price of an energy resource into a single multiplicative coefficient. This coefficient can be used to adjust the market price to reflect the true social value of the energy resource.

1.3 APPROACH AND ORGANIZATION

In the next section we will develop the conceptual framework for determining the optimum energy conservation standard for the heating and cooling loads of buildings. The concept of life-cycle cost minimization will be discussed from the private and then the social points of view. The reasons why actual market prices may fail to reflect the social values of energy resources will be explained and illustrated. These reasons will serve to suggest ways to adjust energy prices so as to reflect social values.

In section 3, RIF's will be applied to a simple model for determining optimum standards for the heating load characteristics of a building component. Alternative formulations for RIF's will first be presented and then the cost minimization model will be developed. Then, a family of RIF values will be introduced into the model, the resulting optimum standards will be analyzed, and the limitations of the analysis will be discussed. In section 4 several alternative forms of the cost model will be developed by varying the assumptions regarding climatic loads and the cost of energy conservation techniques. The effects of introducing a family of RIF's into these more general forms of the model will be analyzed.


³ Section 12 has undergone two open reviews, and Panel 12 of the Standard 90 Project Committee has recommended that it be added to the Standard. For further details on the status and content of Section 12, see William J. Coad, "Section 12: Toward a More Effective Use of Energy Resources," *ASHRAE Journal*, Vol. 19, No. 5 (May 1977), pp. 32-33.

⁴ For further discussion of Section 12 of ASHRAE Standard 90-75 and its distinction between RIF's and RUF's, see Robert R. Jones, "Resource Impact Factor (RIF) Approach to Optimal Use of Energy Resources," *ASHRAE Journal*, Vol. 18, No. 10 (October 1976), pp. 15-18. Also, see Harry H. Phipps, "The RUF Concept as an Energy Measurement Tool," *ASHRAE Journal*, Vol. 18, No. 5 (May 1976), pp. 28-30.

⁵ For a discussion of the inappropriateness of relying solely on Net Energy Analysis, see David A. Huettner, "Net Energy Analysis: An Economic Assessment," *Science*, Vol. 192 (April 9, 1976), pp. 101-104. For a brief overview of several approaches to energy analysis see Kenneth C. Hoffman, "Some Comments on Energy Accounting," paper presented at the panel discussion on Energy, Environment and Economics, 68th Annual Meeting, American Institute of Chemical Engineers, November 1975.

Section 5 will present a general summary of the report and of its major findings. These conclusions concern: (1) the appropriate formulation of RIF's for use in developing an energy conservation standard; (2) the effects of using RIF's on the degree of stringency (allowable energy consumption rate) specified by the standard; and (3) the net gain in economic efficiency from using RIF's rather than unadjusted market prices for energy in the development of the standard. Finally, this gain in economic efficiency resulting from the use of RIF's will be graphically illustrated and analyzed in the appendix.

Facing page: *The price paid for energy at the building site may differ from its total value to the nation. Resource Impact Factors can help conservation standards for new buildings reflect the total value of energy.*

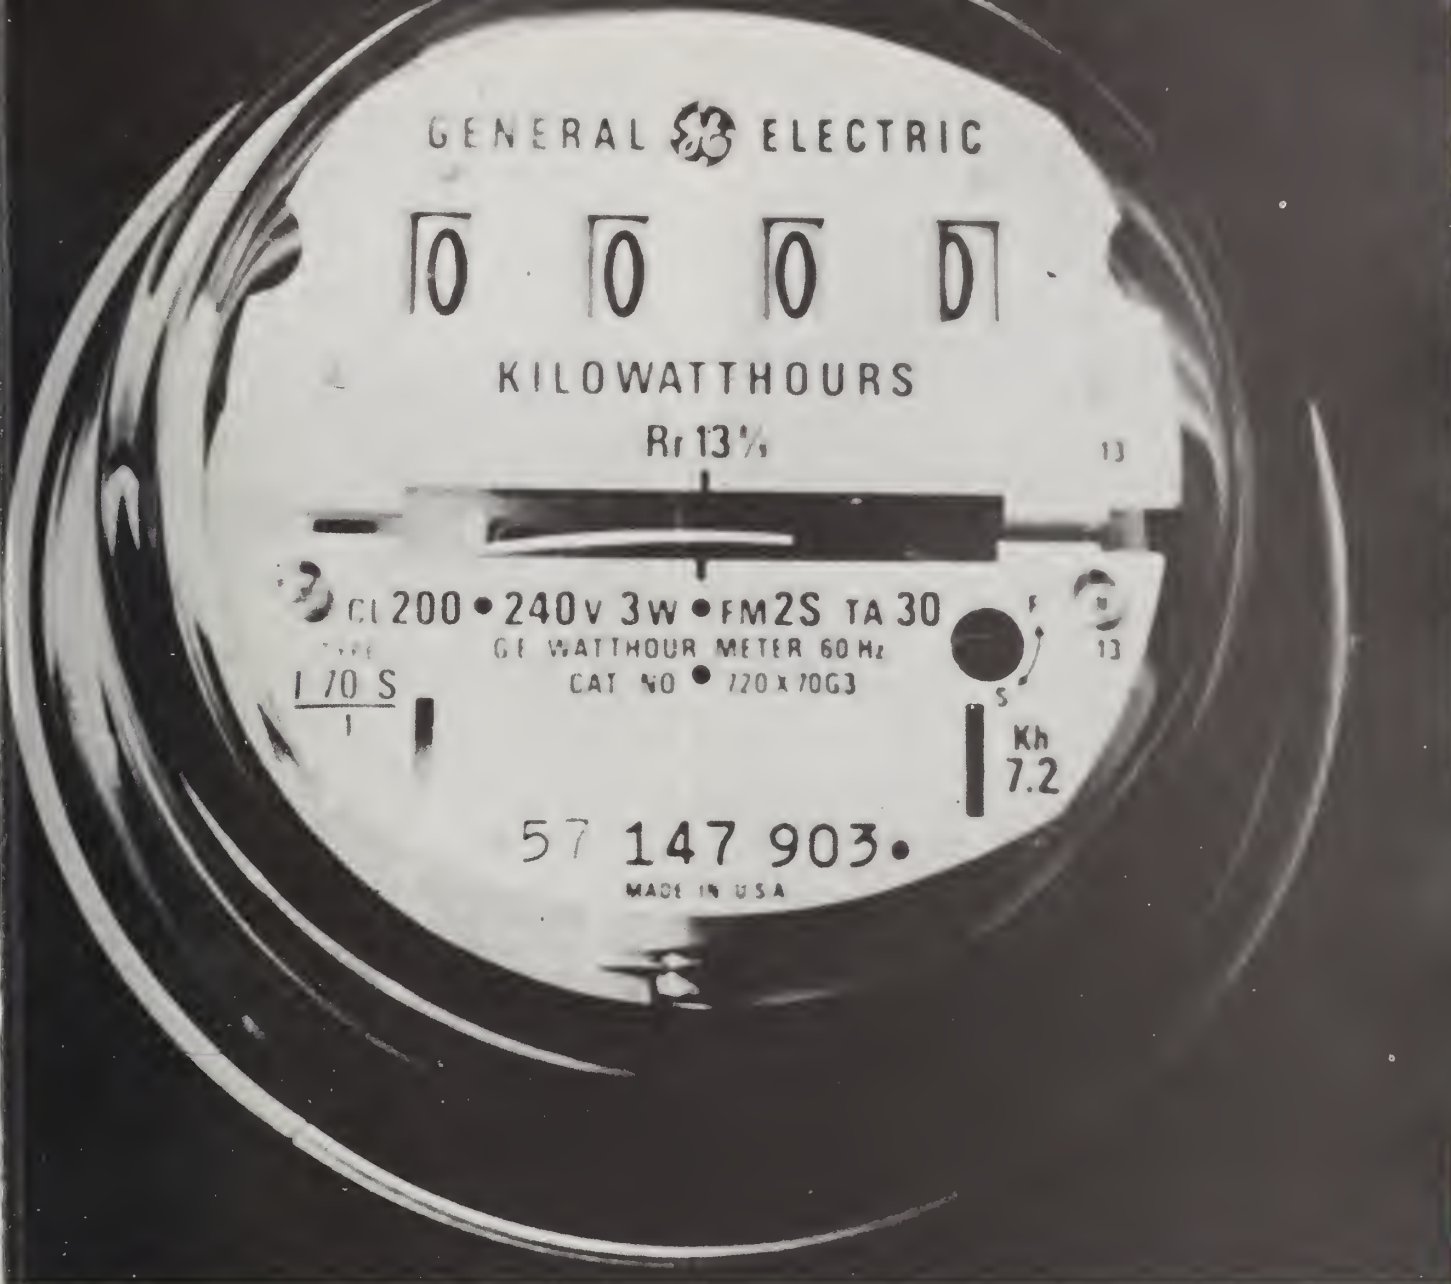

2. CONCEPTUAL FRAMEWORK FOR AN OPTIMUM STANDARD

As we have seen in our discussion of the relevant legislation, the ultimate goal is to achieve the maximum practicable improvements in energy efficiency. Moreover, the legislation emphasizes the need to analyze the standard in terms of its costs and benefits. Thus, we have chosen to concentrate our analysis on the effects of RIF's on an optimum standard, that is a standard which achieves the greatest possible net

benefits (dollar savings minus costs).⁶ Moreover, for purposes of illustration we will focus on setting a standard for the conservation of energy used only to heat and cool buildings.

⁶ If, on the other hand, the standard to be developed is not based on a comparison of costs and benefits, then there would be no way to introduce RIF's into the development process.

There are two possible points of view to take in measuring net benefits: (1) that of a private investor or potential homebuyer; and (2) that of society or the public at large. In rare circumstances these two points of view lead to the same optimum. Often, what is optimum for a private consumer or producer may not be optimum for society as a whole. As we shall see, the latter is usually the case when dealing with energy. We will define more precisely what is meant by an optimum standard first from the private viewpoint and then from the social viewpoint.

2.1 OPTIMUM STANDARDS FROM THE PRIVATE PERSPECTIVE

2.1.1 Life-Cycle Cost Minimization

To select an optimum energy conservation standard, one must consider all costs occurring over the life of the building which relate to the supply of heating and cooling services.⁷ These would include such first-cost items as the insulation used in the building envelope, the heating and cooling equipment and the choice of storm windows. The recurring costs would depend on the annual fuel consumption required to achieve a given level of comfort. These recurring future costs must be discounted in order to be comparable with the first-cost items. Then, all these cost items are summed to get the total present value of the cost of heating and cooling the building over its life. Finally, this present value figure is minimized with respect to the entire range of choices for insulation levels, heating and cooling equipment, and storm windows. That is, the least-cost design combination of these components is selected.

Alternative choices for the same component: The simplest application of life-cycle cost minimization is for the case of a single building component with alternative levels of energy conservation. An example would be various levels of insulation in the attic. As the level of insulation is increased, the energy required to heat and cool the building decreases, but at a decreasing rate. This means that each successive unit of insulation yields less benefits in terms of saved energy than the preceding units. If the cost of each unit of insulation increases, remains constant, or at least does not decrease at a rate faster than that of the

benefits, then that level of insulation which yields incremental benefits equal to its incremental costs will be the level which also minimizes the life-cycle costs of supplying heating and cooling services to the building.

Alternative components: If the above minimization procedure is applied to all the components of a building, then the optimum energy conservation standard for that building will generally be found. One exception to this result is due to possible interdependencies between the various building components. Thus, for example, the efficiency of the heating equipment will have some effect on the optimum level of insulation in the walls and attic. When such interdependencies are significant, all possible combinations of levels of equipment efficiency and of insulation should ideally be examined to find the one with minimum life-cycle costs.⁸

An optimum building design developed with this minimum-cost method has the convenient characteristic that no more energy savings can be achieved by shifting resources from one component to another. In other words, greater energy savings are available only by increasing construction costs and the extra dollar savings would not justify those additional construction costs. This means that an economic balance has been achieved among the components in that the total energy-related construction budget cannot be reallocated differently among the components to reduce energy consumption.

Alternative buildings: An energy conservation standard that is to be optimum must also achieve an economic balance among all buildings governed by the standard. This requires that an alternative standard could not achieve lower energy expenditures for the same national energy-related construction budget by setting stricter specifications for some buildings and more lenient ones for others. Otherwise the alternative standard would be superior.

An important implication of this optimality requirement is that the climatic conditions of each building must be taken into account. Buildings located in severe climates have greater energy loads than elsewhere, and consequently the benefits available from an additional expenditure on energy-saving construction techniques are greater for such buildings. A standard which treats all climates alike by requiring the same overall coefficient of heat transmission (or U value), could always be improved by raising the maximum allowable U value for mild climates and lowering it for severe climates—without increasing the nation's energy-related construction budget at all.

⁷ This discussion of minimization of life-cycle heating and cooling costs is intended only as a brief overview. For a more detailed development see Stephen R. Petersen, *Retrofitting Existing Housing for Energy Conservation: An Economic Analysis* (Building Science Series 64; Washington, D.C.: U.S. Department of Commerce, 1974), and "Economic Optimization in the Energy Conservation Design of Single-Family Housing," *ASHRAE Transactions*, Vol. 82, Part I, 1976.

⁸ Currently, research is being conducted at the National Bureau of Standards to model these various interdependencies.

Thus, the life-cycle cost minimization procedure will lead to a more stringent standard (in the sense of a lower allowable U value) for buildings in severe climates than for similar buildings in mild climates.⁹

2.1.2 Value Differentiation among Energy Types

Just as for differentiation among climatic conditions, a similar argument can be made for distinguishing among the effective prices paid for different energy types.¹⁰ A building which uses a more costly energy form will yield greater benefits from an extra expenditure on energy-saving techniques because the value of the saved energy is greater. If a standard were developed which ignored the differences in the values of the energy types, then there would be room for improvement in benefits without even adding to the overall cost of compliance. One could simply design a new standard that would shift some of the energy-saving construction resources from buildings which use low-cost energy to those which use high-cost energy. The net dollar savings from the latter standard would be greater than those from the original standard which did not differentiate among the values of the energy types.

Thus, if the standard is to achieve the greatest possible net economic benefits (i.e., be truly optimum), it must take account of differences in the values of the energy types. There is, moreover, a further relationship between optimality and the value of energy. The way in which energy resources are valued in the analysis determines the nature of the optimality achieved. The conceptual framework presented thus far has focused on the development of a standard which is optimum from the private building owner's point of view. That is, the standard was said to be based on the principle of minimizing the present value of all the privately incurred energy-related costs of the building over its entire life cycle. We now will modify this principle so that it will lead to a standard which is optimum from society's viewpoint.

⁹ It should be noted that if a cost-effective standard were stated in terms of an annual energy budget rather than a U value, the more severe climate would be permitted a higher annual energy budget. This is because the additional insulation called for under a cost-effective standard will not completely compensate for the greater heating load imposed by the severe climate.

¹⁰ Effective price here means the number of dollars required to be spent to get one unit of usable heat, cooling power, or light added to the conditioned space.

2.2 OPTIMUM STANDARDS FROM THE SOCIAL PERSPECTIVE

The purpose of developing a national energy conservation standard is to encourage practices in the design of new buildings which are optimum for the nation.

Because of certain distortions in the markets for energy resources, what is optimum for the nation may not be optimum for the individual prospective homeowner. That is, a standard which minimizes the life-cycle energy-related costs actually incurred by the homeowner will not necessarily minimize those costs when they are measured from society's point of view. This is because energy resources are valued differently by individuals and by society.

Traditional economic theory of perfectly competitive markets shows that under very restrictive assumptions the prices paid for resources are equal to their true social values.¹¹ According to this theory, resource users are motivated to employ them up to the point at which the value produced by the last unit of the resource equals the price paid for it. Similarly, the suppliers of the resource will make it available up to the point at which the cost of supplying the last unit will just be covered by the price received for it. In this way resources are allocated most efficiently since no more surplus can be squeezed out of them. That is, to use a resource beyond the point dictated by its price would mean that the additional units employed would produce outputs worth less than the cost of the resources themselves. Thus, the resource price is the key which leads users to employ and suppliers to make available the optimum amount.

This ideal world of perfect competition in the supply and demand of a resource is illustrated graphically in figure 2.1. The line S represents the quantities of the resource that suppliers would be willing to make available at various selling prices in a given market and during a specific time period. The upward slope is used to show that as more of the resource is produced, the cost of producing each successive unit generally increases, which in turn requires a higher price to justify production.¹² The line D , on the other hand, represents the quantities of the resource that users would be willing to buy at various prices in the same

¹¹ For example, see Richard H. Leftwich, *The Price System and Resource Allocation* (3rd ed.; New York: Holt, Rinehart, and Winston, 1966), Chapter 15, or Ian M. D. Little and James A. Mirrlees, *Manual of Industrial Project Analysis in Developing Countries*, Vol. II: *Social Cost Benefit Analysis* (Paris: Development Centre of the Organization for Economic Cooperation and Development, 1968), Chapter II.

¹² This increasing cost assumption generally holds in the short run when existing capacity cannot be expanded. In the long run, if capacity is expanded, unit costs may increase, decrease, or remain constant.

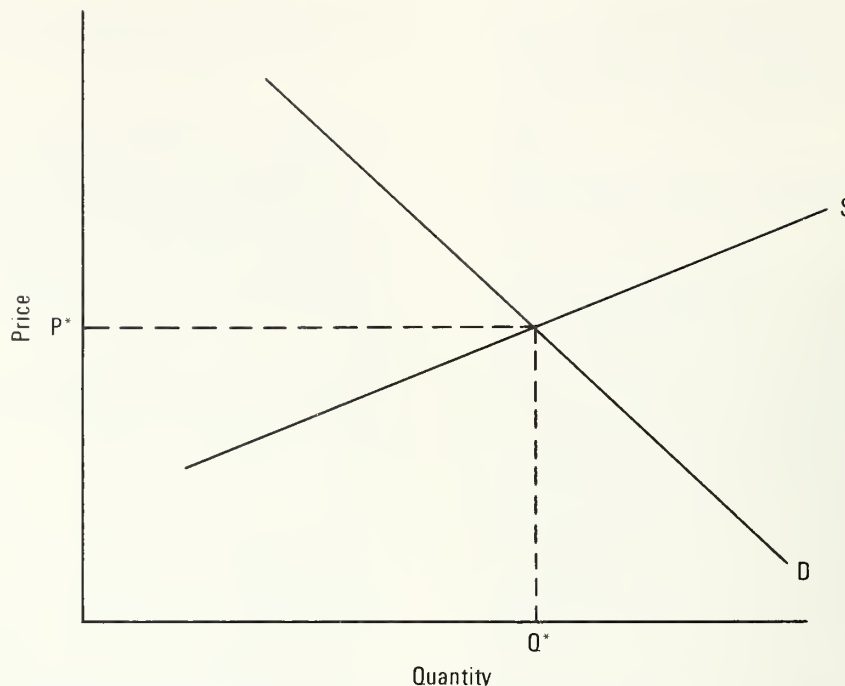


FIGURE 2.1 COMPETITIVE MARKET FOR A RESOURCE

market and during the same time period. The downward slope indicates that as more of the resource is demanded, the value generated by each successive unit employed declines, which in turn reduces the price which users are willing to pay for additional units. At prices above P^* , suppliers make more units available than users want and the resulting surplus drives the price down to P^* . At prices below P^* , suppliers make fewer units available than users want and the resulting shortage drives the price up to P^* . At P^* there is neither shortage nor surplus and Q^* is supplied and demanded. Users and suppliers are willing to continue buying and selling this equilibrium quantity at this equilibrium price. In addition to providing for an equilibrium in the sense that supply and demand are in balance, P^* and Q^* are optimum in the sense that the correct amount of the resource is being produced and used. That is, units of the resource demanded in excess of Q^* would be employed to produce output whose value is less than the cost of supplying the resources (D is below S to the right of Q^*). On the other hand, if resource units fewer than Q^* are demanded, they would be employed to produce output valued above the cost of supplying the resources (D is above S to the left of Q^*).

To operate so efficiently, however, the conditions of the perfectly competitive model must be satisfied for

the market being considered. These conditions guarantee that the resulting equilibrium price that is visible to all participants in the market will indicate to the suppliers, on the one hand, the true value of additional units of the resource, and to the demanders, on the other hand, the true social cost of producing additional units. If the price is in any way prevented from performing this vital function, then the resource will not be supplied nor employed at optimum levels. There are a number of ways in which the price can fail to provide this essential information to the demanders and suppliers of the resource. We will now focus on several of the most important ones for energy resources.

Unit taxes and monopoly: One possible source of divergence between actual prices and social values or costs of energy resources is a tax per unit produced or sold.¹³ Examples would be the utility taxes on the number of therms of gas or kilowatt-hours of electricity consumed, and the former oil import tax per barrel included in the per gallon price of home heating oil. Such taxes generally force the market

¹³ A useful collection of articles on energy taxes and their implications can be found in Gerard M. Brannon (ed.), *Studies in Energy Tax Policy* (Cambridge, Mass.: Ballinger Publishing Company, 1975).

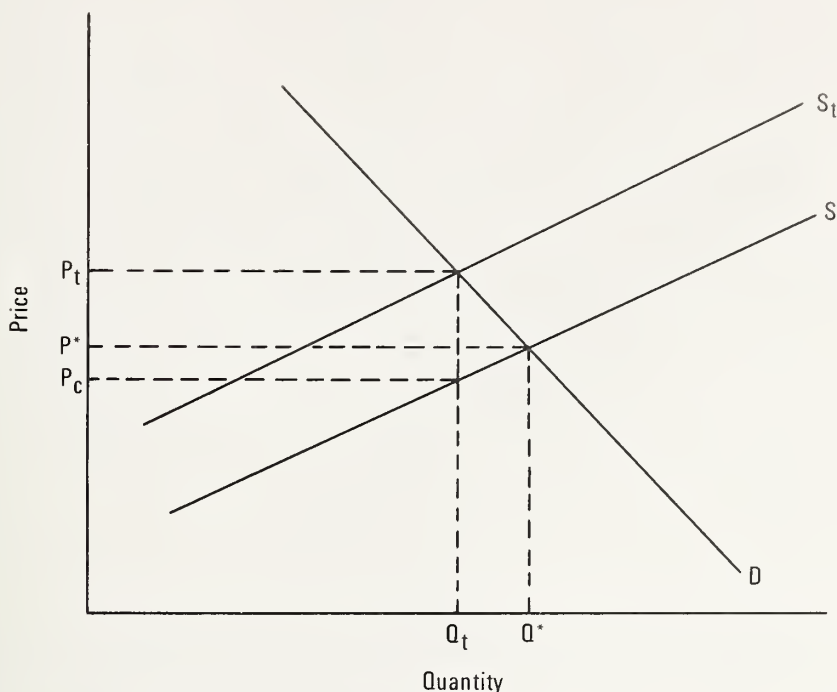


FIGURE 2.2 EFFECTS OF A UNIT TAX

equilibrium price to differ from the true social cost of supplying the resource.¹⁴ This difference is illustrated in figure 2.2, which is the same as figure 2.1 except that the line S_t has been added above the parallel to line S . The line S_t represents actual costs of production plus the amount of the unit tax. This upward shift in the suppliers' requirements changes both the equilibrium quantity (from Q^* to Q_t) and price (from P^* to P_t). The effect on the price means that the actual market price (P_t) visible to and paid by the users exceeds the price (P^*) which would exist if there were no tax and by an even greater amount exceeds the price (P_c) necessary to cover the actual costs of production.¹⁵ This implies that users do not correctly perceive the true social cost of producing the resource, are forced to pay a higher price, and consequently under-utilize the resource.¹⁶

A similar situation of distorted market prices exists when there are so few firms competing in the market that the suppliers have a certain degree of monopoly power. In this case, suppliers in an attempt to maximize profits, will tend to restrict the quantity available such that the price paid per unit is greater than the true cost of producing those units.¹⁷ Here again, then, the decisions of resource users are not guided by the true cost of the resource.

Environmental considerations: Another source of possible divergence between the actual price paid for a resource and the social cost of making it available is a group of factors called externalities or environmental effects.¹⁸ These effects are present whenever a particular production or consumption process generates a cost or benefit for persons not directly

¹⁴ This is true unless the purpose of the tax is to offset negative environmental effects or excess profits, or to fulfill some other policy objective of the agency responsible for imposing the tax.

¹⁵ The difference between P_t and P_c is given by the amount of the per unit tax.

¹⁶ The same type of analysis applies to the case of subsidies, which can be treated as negative taxes. In this case, however, a subsidy per unit of production would cause the supply line to fall by the amount of the subsidy rather than to rise. As a result, users are able to purchase the resource at a price below its true cost of production, and consequently the resource is over-utilized.

¹⁷ See Edwin Mansfield, *Microeconomics: Theory and Applications* (New York: W. W. Norton & Company, 1970), Chapter 9, for a detailed explanation of the theory of pricing and output choice for monopolists.

¹⁸ For an excellent survey of the literature on environmental economics, see Anthony C. Fisher and Frederick M. Peterson, "The Environment in Economics: A Survey," *Journal of Economic Literature* Vol. 14, No. 1 (March 1976), pp. 1-33. Also, for two convenient collections of articles on the economic theory of externalities, see Robert J. Staaf and Francis X. Tannian, *Externalities: Theoretical Dimensions of Political Economy* (New York: Dunellen Publishing Company, Inc. n.d.), and Steven A. Y. Lin (ed.), *Theory and Measurement of Economic Externalities* (New York: Academic Press, 1976).

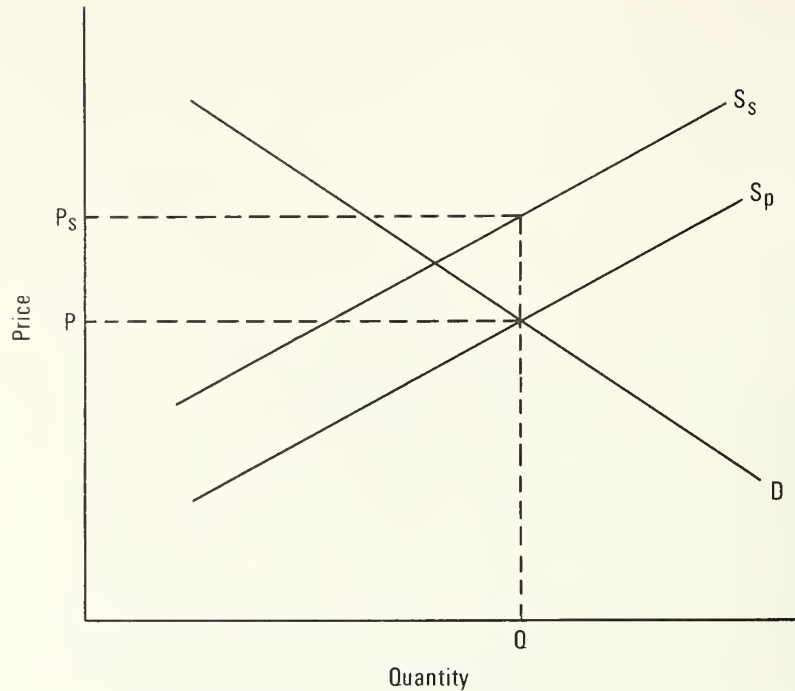


FIGURE 2.3 SOCIAL COSTS OF COAL-FIRED ELECTRIC POWER

involved in the process. As a result the price established by the supply and demand of the resource will generally not reflect these external (or indirect) benefits and costs. In the case of energy resources most of the external effects take the form of costs rather than benefits.¹⁹ As an illustration, consider the generation of electricity from coal. To the extent that environmental control legislation allows some residual air pollution, the price users pay for electric power will not reflect all of society's pollution costs of producing the power, but only the direct costs incurred by the utility.²⁰ This example is shown graphically in figure 2.3. The line S_p indicates the costs incurred by utilities which must be covered by the price actually paid by users. The line S_s is the sum of both the private costs and the external costs (i.e., the total social costs) caused by the air pollution. In the absence of an adequate pollution tax, the suppliers and users will agree on amount Q and exchange price P for each unit of electric power. This private price,

however, is deceptively low in that it ignores the social costs incurred by the pollution. In fact, the total social costs of producing the last unit of power in this case would be P_s and the amount by which that last unit is underpriced is $P_s - P$.

National economic independence: In support of various energy policies an appeal has been made in recent years to the need for national economic independence.²¹ The appeal is based on concern over U.S. vulnerability to political influence through oil embargoes and unreasonable price rises. To the extent that energy independence is a national policy objective, it can be reasonably argued that each unit of energy consumed has an extra social cost in terms of increasing our requirement for oil imports and thus our vulnerability to embargoes. Indeed, when considering energy conservation standards that affect the energy use of buildings for many years to come, the argument becomes even more cogent. The more stringent the standard, the less our commitment to energy imports during the next 30 to 40 year life of buildings now being designed.

This national independence goal has implications for the need to adjust energy prices similar to those of

¹⁹ For a very detailed overview of alternative energy technologies and their environmental impacts, see Oklahoma University Science and Public Policy Program, *Energy Alternatives: A Comparative Analysis* (Springfield, Va: U.S. Dept. of Commerce, National Technical Information Service, 1975).

²⁰ Of course, if a tax were imposed which exactly offset these external costs, then the price (including the tax) paid would reflect all social costs of production.

²¹ Uzi Arad, Barry J. Smernoff, and Haim ben-Shaher, *American Security and the International Energy Situation*, 4 vols. (Croton-on-Hudson, N.Y.: Hudson Institute, 1975) provides an overview of the energy independence issue.

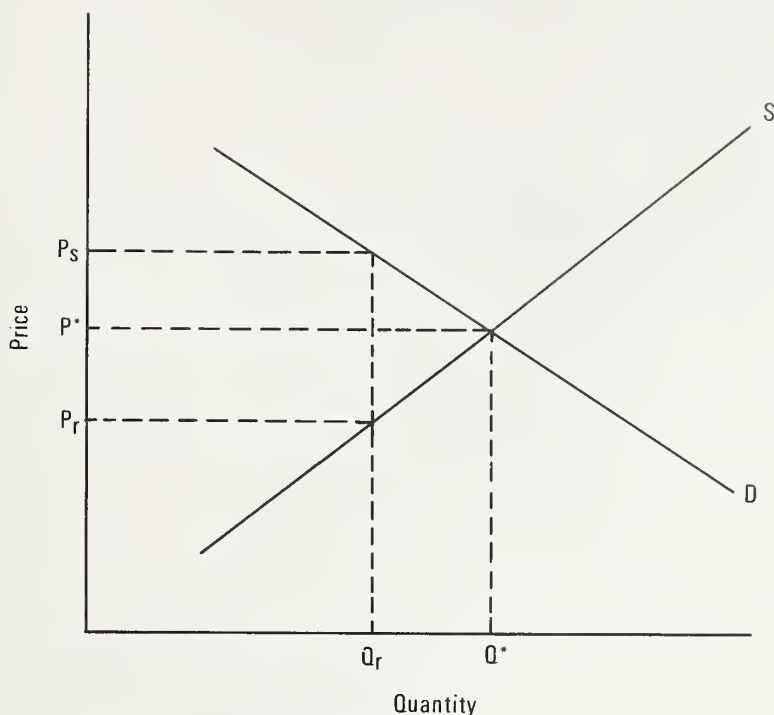


FIGURE 2.4 REGULATION OF THE NATURAL GAS PRICE

externalities discussed above. Just as the external cost of pollution causes the social price of electricity to be above the privately determined market price, so the cost to the nation's economic independence (if such is a public policy goal) makes the social cost of energy consumption exceed its private cost.

Price controls: Deviations between the prices paid for resources and their social value can also come about through price controls. In this situation, the price actually paid is set by legislation or regulation and not by the forces of the market operating through the costs of supply and the benefits from use. The objective of such regulation may be to control excess profits in an industry with little competition or to make a vital resource affordable for low-income households. Thus, even in the absence of externalities, monopoly power, and taxes, the administered price will not necessarily be equal to the social value of the resource. This is illustrated for the case of natural gas in figure 2.4. Because the regulated price, P_r , is set so far below the optimum price, P^* , the suppliers of natural gas are willing to make only Q_r units available rather than the optimum quantity, Q^* . With so few units available, there are many unsatisfied high-value uses to which the gas could have been put. This is indicated by the fact that at Q_r , the premium users would be willing to pay for additional units over and above the regulated price, would be as much as $P_s - P_r$.

Other factors: There are other factors which may cause market prices of energy to be different from the corresponding social values. Because of inadequate information about the long-run scarcity of exhaustible energy resources, present supply and demand forces may lead to equilibrium prices which do not reflect true values. This situation could result in non-optimal rates of resource exploitation.

A similar problem arises because private rates of discount are likely to be greater than the social rate.²² Consequently, private producers will tend to undervalue the future earnings from resources saved for later exploitation. This leads to rates of extraction which are too rapid from society's viewpoint.²³ The same result occurs when two or more producers are exploiting a common resource pool, each producer's share of which depends on his individual rate of extraction.²⁴

²² William J. Baumol, "On the Social Rate of Discount," *American Economic Review*, Vol. 58 (September 1968), pp. 788-802.

²³ Robert M. Solow, "The Economics of Resources or the Resources of Economics," *American Economic Review*, Vol. 64, No. 2 (May 1974), pp. 1-14.

²⁴ For further discussion of various aspects of common property resources, see Edwin T. Haelele (ed.), *The Governance of Common Property Resources* (Baltimore: The Johns Hopkins University Press, 1974).

The preceding discussion covers some of the ways in which the actual prices paid for energy resources may fail to reflect their full social values. As such it offers some insight into the difficulty of using actual energy prices as a basis for energy-related policies such as the conservation standard for building design. Moreover, the items discussed provide at least a partial checklist of factors which should be considered in the development and actual quantification of RIF's. Before RIF's can be quantified, however, a further consideration will have to be made regarding possibly conflicting objectives which may exist among government agencies. For example, a goal of keeping the cost of vital home heating fuels within the budgets of low-income households may conflict with a goal of national energy independence. If RIF's are to reflect a unified national energy policy, such conflicts must first be resolved.

Facing page: *The economic model presented in this section determines the optimum amount of insulation, given its cost and the social value of the energy saved.*



3. RIF'S IN AN OPTIMUM STANDARD DETERMINATION MODEL

In this section we will apply a range of RIF's to a life-cycle cost minimization model for the determination of a socially optimum conservation standard. Two alternative ways of formulating RIF's will be presented and then the optimum standard determination model will be explained. These formulations will be used to introduce a family of RIF values explicitly into the model to compare the resulting energy standard with and without RIF's.

3.1 ALTERNATIVE FORMULATIONS FOR RIF'S

RIF's may be formulated to be applied to energy resources in either of two fundamental ways. The first way would have RIF's formulated to be multiplied by the physical quantities of the energy resource used. According to the other formulation, RIF's would be applied directly to the actual price of the energy resource. Each of these formulations will be discussed in turn.

3.1.1 Quantity Multiplier Formulation

Quantity multiplier RIF's could be formulated as coefficients to be multiplied times the particular energy load in question. The annual energy load would be denominated in units of energy output (10^6 Btu's) required to satisfy the needs of the building. In the case of space heating, for example, this energy load would be the heating value of the energy output into the conditioned space that is necessary to maintain a desired comfort level.²⁵ To specify the RIF coefficient one would have to define a unit of measurement for scaling the relative impacts of using the various energy types. Such a measurement unit could be arbitrarily specified as a "resource impact unit."²⁶ These impact units would attempt to measure such factors as the environmental and national security issues. Then the RIF for a particular energy type would be a coefficient dimensioned as the number of resource impact units per unit of output for that energy type. Table 3.1 presents some hypothetical quantity multiplier RIF's to illustrate how they might operate.

Column 1 shows the number of physical units of each alternative energy type required to satisfy the annual heating load of 36×10^6 Btu specified for a particular building (e.g., 429 gallons of fuel oil). Column 2 gives

²⁵ Another way to formulate quantity multiplier RIF's would be as multipliers applied to the energy content of the fuel and energy delivered to the building site. In this case, energy losses occurring at the building site would not be included in the RIF value itself, but rather would be included in the estimate of the energy content of the delivered fuel or energy to which the RIF value is applied.

²⁶ Alternatively, the impact unit could be stated in terms of the number of equivalent Btu's.

the energy load in terms of the heating value of the energy output needed to maintain a desired degree of comfort (36×10^6 Btu). Column 3 presents the RIF value corresponding to each energy resource type, measured in terms of impact units per 10^6 Btu of energy output needed to meet the heating load (e.g., 1.2 impact units per 10^6 Btu of heating output from oil). Finally, column 4 shows the product of columns 2 and 3, which represents the number of impact units required to meet the heating load by means of each energy type (e.g., 43.2 impact units for oil).

This quantity multiplier formulation is useful in that the resulting impact numbers permit comparison of the relative merits of using one energy type rather than another. Using these impact numbers, standards could be developed so as to achieve a relative balance among energy types with respect to the stringency of the standards. Thus, for a given energy conservation construction budget, a system of such standards could be designed so as to minimize the sum of the impact numbers for space heating.

The fundamental shortcoming of this formulation lies in its inability to establish the appropriate construction budget. Because the impact numbers are not denominated in dollars (the measurement unit of the construction costs), the formulation cannot be used to establish the appropriate economic balance between the amount of one energy type and the application of energy conservation features in a building design. This quantity multiplier does not allow one to weigh the importance of using all types of energy resources as compared with energy-conserving resources. Consequently, it cannot be used to determine how much energy is worth being saved. Of course, this quantity multiplier could be converted into a value

Table 3.1 HYPOTHETICAL QUANTITY MULTIPLIER RIF'S

Energy Type	Units Needed ^a	Heating Load (10^6 Btu)	RIF	Impact
	(1)	(2)	(3)	(4)=(2)×(3)
Nat. Gas (MCF)	60	36	1.3	46.8
Oil (Gal.)	429	36	1.2	43.2
Electric (kWh)	10,548	36	2.0	72.0

^a The number of physical units of input of the energy type needed to satisfy the given annual heating load of 36×10^6 Btu. The heating system output of 36×10^6 Btu was converted to corresponding input requirements by assuming the following energy contents and conversion efficiencies:

- (1) Natural Gas: 10^6 Btu/MCF and 60% efficiency
- (2) Oil: 140,000 Btu/Gal. and 60% efficiency; and
- (3) Electric: 3,413 Btu/kWh and 100% efficiency.

multiplier if a dollar value could be established for the resource impact unit chosen. Then, the energy and non-energy resources would have a common basis for comparison. In this case, however, the RIF would no longer be a quantity multiplier, but rather a value multiplier. This is equivalent to the price multiplier formulation which we will now discuss.

3.1.2 Price Multiplier Formulation

The other formulation possible for RIF's is as a multiplier to be applied to the actual price of each energy type.²⁷ This multiplier would represent the ratio of the estimated social price to the actual price of the resource. As such, this factor would convert the private price or the actual price paid for the energy to its corresponding social price. In short, it would act as an adjustment factor which corrects existing actual prices for the various price-distorting effects (external effects, the need for economic independence, unit taxes, monopoly power, and price controls) which were discussed in subsection 2.2.1. Table 3.2 offers some hypothetical price multiplier RIF's to illustrate this kind of formulation.

Column 1 gives the approximate prices actually paid by homeowners for each physical unit of the energy types and column 2 uses energy contents and efficiencies to convert these to effective prices paid for one million Btu's delivered to the conditioned space. Column 3 lists hypothetical price multiplier RIF's for

each type of energy and column 4 gives the products of columns 2 and 3 which represent the adjusted social prices of the energy types.

3.2 AN OPTIMUM STANDARD DETERMINATION MODEL

In this section we shall briefly summarize the life-cycle cost minimization model developed by Stephen Petersen to determine the economically optimum levels of thermal resistance in building components.²⁸ Thermal resistance (R) is defined as the exact reciprocal of the overall coefficient of thermal transmission (U). The resistance of components of the building envelope is one of the primary determinants of heating and cooling energy used in buildings, especially of the residential and small commercial type. This model will be used to show how climate factors and energy prices can be considered directly in determining the extent to which energy conservation modifications should be made to the design of the building envelope. By determining the optimum level of resistance (R_o) for a particular component such as the attic floor, the model also determines the optimum coefficient of thermal transmission (U_o), because of the exactly inverse relationship between R and U . In speaking of the optimum standard we shall henceforth be referring to this optimum coefficient of thermal transmission (U_o). Thus, the more stringent the standard (i.e., the more energy conserving), the lower will be U_o .

²⁸ Stephen R. Petersen, "Economic Optimization in the Energy Conservation Design of Single-Family Housing," *ASHRAE Transactions*, Vol. 82, Part I, 1976.

²⁷ For a good introduction to this type of price multiplier (sometimes called a shadow price) applied to benefit-cost analysis, see Peter G. Sassone, "Shadow Pricing in CBA: Mathematical Programming and Economic Theory," *The Engineering Economist*, Vol. 22, No. 3 (Spring 1977), pp. 219-233.

Table 3.2 HYPOTHETICAL PRICE MULTIPLIER RIF'S

	Actual Price (\$/Unit)	Effective Price ^a (\$/10 ⁶ Btu)	RIF	Social Price (\$/10 ⁶ Btu)
Energy Type	(1)	(2)	(3)	(4)=(2)×(3)
Nat. Gas (MCF)	2.00	3.33	2.0	6.66
Oil (Gal.)	.40	4.76	1.5	7.14
Electric (kWh)	.03	8.79	1.1	9.67

^a Energy contents and conversion efficiencies for each type are as follows:

- (1) Natural Gas: 10⁶ Btu/MCF and 60% efficiency;
- (2) Oil: 140,000 Btu/Gal. and 60% efficiency; and
- (3) Electric: 3,413 Btu/kWh and 100% efficiency.

3.2.1 Derivation of the Model

Considering only the heating load, the life-cycle costs (LCC) attributable to heat losses through one square foot of attic floor area for given heating equipment and climatic conditions can be represented by the following expression:

$$LCC = a + b \cdot R + (UPW \cdot 24 \cdot DD \cdot P_e) (1/R). \quad (3.1)$$

The notation is to be interpreted in the following manner:

- a = The fixed cost component of thermal resistance (\$/ft²).
- b = The cost per additional unit of thermal resistance (\$/ft²/R).
- R = The number of units of thermal resistance on each square foot of attic floor area (hr-ft²·°F/Btu).

$$UPW = \sum_{n=1}^N \left[\frac{1+e}{1+d} \right]^n = \left[\frac{1+e}{d-\epsilon} \right] \cdot \left[1 - \left(\frac{1+e}{1+d} \right)^N \right],$$

where e is the annual rate of fuel price escalation in real terms, d is the real discount rate, and N is the number of years in the useful life of the building. For example, with a 10 percent real discount rate, a 3 percent rate of real fuel price escalation, and a 40 year life, $UPW = 13.65$. This uniform present worth (UPW) factor operates as a fixed coefficient to convert annual energy costs to their equivalent present value.

$$DD = \sum_{i=1}^{365} (B - \bar{T}_i), \text{ for all } \bar{T}_i < B, \text{ where } \bar{T}_i \text{ is the average}$$

temperature for the i th day and B is the base temperature (usually 65 °F), chosen as the cutoff point below which heat is needed from the heating system to keep the conditioned space at a target temperature (usually 70°). This summation measure is referred to as heating degree days and is commonly used to approximate the annual heating load imposed by a given climate. Multiplication by 24 simply converts degree days to degree hours.

- P_e = the effective price actually paid for one Btu of heating energy output delivered to the conditioned space, taking account of conversion efficiencies.

This expression for life-cycle costs can be minimized by partial differentiation with respect to R , setting the first derivative equal to zero and solving to find the optimum level of thermal resistance, R_o .

$$R_o = [UPW \cdot 24 \cdot DD \cdot P_e \cdot (1/b)]^{1/2}. \quad (3.2)$$

Since the rate of thermal transmission, U , is defined as the exact reciprocal of R , we have the optimum coefficient of thermal transmission, U_o , for a square foot of attic floor area:

$$U_o = \frac{1}{R_o} = \left[\frac{b}{UPW \cdot 24 \cdot DD \cdot P_e} \right]^{1/2}. \quad (3.3)$$

Although this formulation of the model is quite simple, it provides the most important elements needed to determine the optimum component performance standard for attics.

3.2.2 Significance of the Model

Several features of this expression for the optimum component performance standard are worthy of note. In the first place the optimum standard (U_o) is an increasing function of the marginal cost of adding resistance units (b), although it increases as the square root of this cost. This means that a doubling of the price of insulation would result in only a 41.4 percent increase in the maximum heat transmission rate allowed by the optimum standard, other things being equal.²⁹ This positive relationship has the intuitive appeal that the more costly insulation becomes, the more lenient will be the standard by allowing higher rates of thermal transmission, and consequently calling for lesser amounts of insulation.

Another significant aspect of this expression is that there is an inverse relationship between the number of degree days (DD) and the standard (U_o). This implies that buildings in more severe climates should be subject to a more stringent standard requiring a lower rate of thermal transmission. It should be noted that this inverse relationship is not linear but rather is based on the square root of degree days. Thus, a house in a climate with twice as many degree days would be subject to a standard requiring a 29.3 percent lower rate of thermal transmission.³⁰

²⁹ Letting U'_o represent the standard after the doubling of the marginal cost of resistance, we have $U'_o = \sqrt{2} \cdot U_o = 1.414 U_o$, which means an increase of 41.4 percent.

³⁰ Letting U'_o represent the standard for the climate with twice as many degree days, we have $U'_o = U_o / \sqrt{2} = 0.707 U_o$, which means a decrease of 29.3 percent.

The final noteworthy feature of this expression for the optimum component performance standard is that, just as with degree days, U_o also varies inversely as the square root of the price of energy (P_e). That is, a doubling of the price of energy calls for a 29.3 percent decrease in U_o , and consequently the same 29.3 percent decrease in the maximum energy consumption allowed by the optimum standard. The negative direction of this relationship makes sense in that an increased price of energy should lead to decreased consumption of it through the substitution of additional insulation. This last feature has a direct bearing on the effect of applying RIF's to the model.

3.3 APPLICATION OF PRICE MULTIPLIER RIF'S

As it stands, the expression for U_o developed above is based on the goal of cost minimization from the private point of view. To adjust the expression to reflect the social viewpoint, it is necessary to replace the effective price paid for energy (P_e) with the social price of energy.³¹ Using the price multiplier formula shown in table 3.2 above, which gives RIF's as the ratio of the social price to the effective price, all that needs to be done is to multiply the symbol P_e in the expression for U_o by the appropriate RIF of the fuel type being considered.³² This will result in the following new expression for the optimum perfor-

³¹ It might also be necessary to replace the marginal cost paid for insulation (b) by its appropriate social cost counterpart, if there is reason to believe that a significant divergence exists between its actual cost and the social cost. If such social cost estimates are developed, then they should be used in place of b in the formula. A preliminary estimate might be made by applying RIF's to the energy content of insulating materials. Some work has been initiated in this area of energy content of selected building materials and for the construction sector as a whole. See B. M. Hannon, et al., *Energy Use for Building Construction. Progress Report, March 1, 1976-August 1, 1976* (Center for Advanced Computation, Illinois University, Urbana, August 1976).

³² This formulation allows us to establish clearly the effect of RIF's on the optimum standard. It is conceivable, however, that the estimated social value of energy may not continue to be a constant (or even constantly growing) multiple of the actual price paid for energy over time. In this case, the proper approach to actually determining the socially optimum standard would be to replace the product $UPW \cdot P_e \cdot RIF$ in expression (3.4) with the summation,

$$\sum_{n=1}^N \frac{(P_e)_n}{(1+d)^n},$$

where $(P_e)_n$ represents the estimated social value of the energy type for the n th year.

mance standard from the social point of view (U_o^*):

$$U_o^* = \left[\frac{b}{UPW \cdot 24 \cdot DD \cdot P_e \cdot RIF} \right]^{1/2}. \quad (3.4)$$

Thus, the relationship of the socially optimum standard to the privately optimum standard can be established as follows:

$$U_o^* = \left[\frac{b}{UPW \cdot 24 \cdot DD \cdot P_e} \right]^{1/2} \cdot \left[\frac{1}{RIF} \right]^{1/2}, \text{ or}$$

$$U_o^* = U_o \cdot \left[\frac{1}{RIF} \right]^{1/2}. \quad (3.5)$$

So, in general, it can be said that for a given privately optimum standard the socially optimum standard varies inversely with the square root of the RIF value.

In order to analyze this relationship properly, the range of RIF values must be established. A RIF value would always be positive but could be less than, equal to, or greater than one, depending on the relative importance of the various elements to be included in the derivation of RIF's. For example, if the price effects of unit taxes and monopoly power predominate, then the social price of the energy type could be lower than the actual price, making RIF less than one. If the actual price paid for one type of energy exactly reflected its social value, then the corresponding RIF would equal one. Finally, if factors such as external effects and price controls predominate, then RIF's will be greater than one.

Table 3.3 shows the relationship between particular RIF values and the resulting socially optimum standard expressed as a proportion of the privately optimum standard. As can be seen, the value of the RIF determines whether or not the use of RIF's leads to greater or less energy consumption. When the RIF is less than one (i.e., the social price is less than the actual price paid), then the introduction of RIF's would have the effect of raising the level of energy consumption allowed by the standard. This would mean less energy conservation with RIF's than without them. If the RIF equals one, then the introduction of RIF's would have no effect on energy consumption. In the more probable event that RIF's are greater than one, the effect of using them is to lower the allowable energy consumption and, thus, to increase the energy savings attributable to the standard. For example, the introduction of a RIF equal to 1.5 (meaning the social price is 50 percent higher than the actual price paid) would lower the maximum energy consumption allowed by the standard by 18.4 percent, to only 81.6 percent of what it would be without the RIF.

An observation can be made from table 3.3 which holds generally, regardless of the value of the RIF

Table 3.3 POSSIBLE RIF VALUES WITH CORRESPONDING RATIOS OF SOCIALLY TO PRIVATELY OPTIMUM STANDARDS

RIF	$U_o^*/U_o = [1/\text{RIF}]^{1/2}$
.50	1.414
.60	1.291
.70	1.195
.80	1.118
.90	1.054
1.00 ^a	1.000
1.10	0.953
1.20	0.913
1.30	0.877
1.40	0.845
1.50	0.816
1.60	0.791
1.70	0.767
1.80	0.745
1.90	0.725
2.00	0.707
2.25	0.667
2.50	0.632
2.75	0.603
3.00	0.577
4.00	0.500

^a Equivalent to not using RIF's.

applied. That is, as the RIF value increases, the corresponding energy consumption rate allowed under the socially optimum standard decreases relative to the privately optimum standard, and absolutely. This inverse relationship is also apparent from figure 3.1 which merely plots the points given in table 3.3. The general pattern of the points is downward sloping to the right which indicates that increases in the RIF value lead to decreases in U_o^* as a proportion of U_o . A more rigorous mathematical demonstration of this observed inverse relationship requires evaluation of the sign of the first derivative of U_o^* with respect to RIF. Thus, partial differentiation of expression (3.5) leads to the following:

$$\frac{\partial U_o}{\partial \text{RIF}} = [-0.5 \text{ RIF}^{-1.5}] \cdot U_o \quad (3.6)$$

Since the value of RIF is always positive, this expression must be negative for the entire range of possible RIF values. This negative value of the first derivative means that the inverse relationship (downward slope) between RIF values and U_o^* holds everywhere.

Table 3.4 presents the calculated values of this first derivative measured in units of U_o for selected RIF values. As indicated in table 3.4, the signs of all the

Table 3.4 SELECTED RIF VALUES WITH CORRESPONDING FIRST DERIVATIVES OF U_o^*

RIF	$\partial U_o^*/\partial \text{RIF} = [-0.5 \text{ RIF}^{1.5}] \cdot U_o$
.50	$-1.414 \cdot U_o$
.75	$-0.770 \cdot U_o$
1.00	$-0.500 \cdot U_o$
1.25	$-0.358 \cdot U_o$
1.50	$-0.272 \cdot U_o$
2.00	$-0.177 \cdot U_o$
3.00	$-0.096 \cdot U_o$

calculated derivatives are negative. Moreover, an additional pattern emerges from table 3.4. Note that as the RIF values increase, the calculated derivatives decrease in absolute value but increase in actual value. This means that as one moves to the right (increasing RIF's) on the curve plotted in figure 3.1, the slope of the tangent to that curve gets steadily flatter. This can be demonstrated mathematically by inspecting the sign of the second derivative of U_o^* with respect to RIF. Differentiating expression (3.6) we have

$$\frac{\partial^2 U_o^*}{\partial \text{RIF}^2} = [0.75 \text{ RIF}^{-2.5}] \cdot U_o \quad (3.7)$$

Since this second derivative is positive for all positive values of RIF, it means that the first derivative, which is negative, is always increasing (i.e., decreasing in absolute value). Thus, as the RIF value is increased by increments of equal size, the effect of each increase in reducing the energy consumption rate allowable by the socially optimum standard steadily decreases. The important implication of this result is that there are diminishing returns in terms of the energy savings attributable to the socially optimum standard from successive equal increments in the value of RIF's.

3.4 LIMITATIONS OF THE ANALYSIS

The foregoing analysis showed the energy-saving effects of using RIF's in determining the socially optimum performance standard for a building component such as the attic floor. Generally, it was found that the higher the RIF value, the lower would be the maximum energy consumption rate allowed by the socially optimum standard. It was also found that in the more likely situation of RIF values greater than one, the energy saved by the socially optimum standard is greater than that saved by the privately optimum standard. The analysis of the economic efficiency effects of using RIF's will be treated in the appendix.

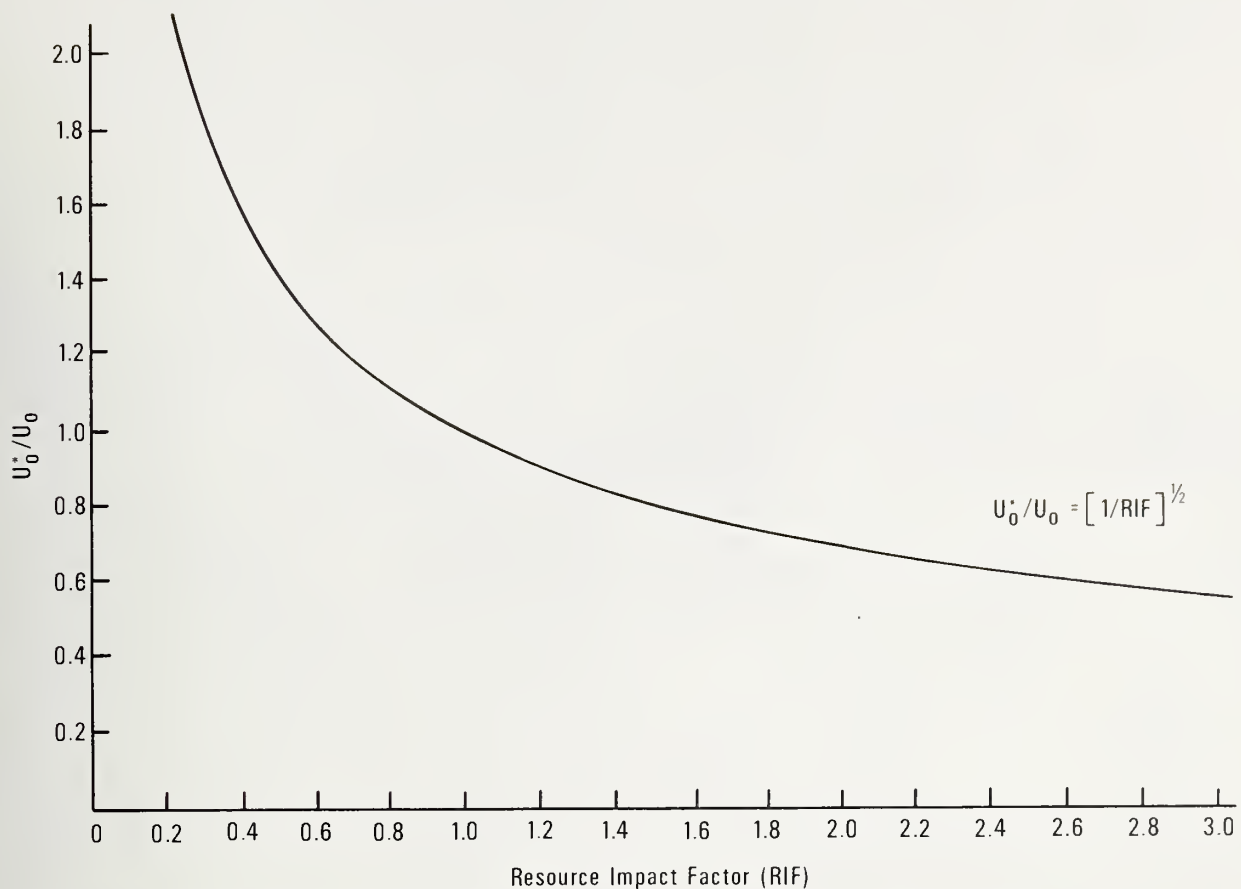


FIGURE 3.1 PLOT OF THE RATIO OF SOCIALLY TO PRIVATELY OPTIMUM STANDARDS AS A FUNCTION OF THE RIF VALUE

The model used in the above analysis has two general limitations: (1) it is suitable for studying component rather than building performance standards; and (2) it is based on some restrictive assumptions which may be violated under actual conditions. A model for determining optimum building performance criteria is currently being developed at the National Bureau of Standards with funding from the Department of Energy. When completed, the model will incorporate the many energy-flow interactions among the various building components. This will allow analysis of the economic trade-offs between interrelated components. Once this model is fully developed, the effect of using RIF's for determining building performance standards could be assessed.

Two restrictive assumptions underlying the model presented above limit its general applicability. The first regards the cost of each additional unit of

resistance. It was assumed that the cost of resistance was a linear function of the level of resistance. That is, the marginal cost of each successive unit of resistance was assumed to be constant, regardless of the total level of resistance. This marginal cost component was represented by the constant parameter, b . It seems likely, however, that within the relevant range the marginal cost of resistance increases as more units are added. Secondly, it was assumed that the temperature base for calculating degree days was the same regardless of the level of resistance. This meant that DD could be treated as a fixed parameter, independent of the level of resistance. It will be shown that, as more resistance is added, the degree-day temperature base is likely to fall, resulting in fewer effective degree days for a given climate. In the next section a model is developed which takes account of these more realistic conditions.

Facing page: *Because of their smaller exposed envelope area, townhouses generally require less energy for heating and cooling than do single-family detached houses.*



4. THE OPTIMUM STANDARDS MODEL GENERALIZED

In this section we modify the optimum standards selection model of section 3 by making alternative assumptions regarding the manner in which resistance costs and the number of degree days depend on the level of thermal resistance. We begin by maintaining our original assumption that the number of degree days is invariant and independent of the resistance level, while allowing resistance costs to assume several alternative functional forms. These modifications regarding resistance costs lead to the development of two new cases of the model which have different for-

mulations for the rate of thermal transmission allowed by the optimum standard. These new formulations are each analyzed and compared in terms of the effect of using RIF's in the determination of the socially optimum standard. In the second subsection we consider the manner in which the number of degree days are likely to vary as a function of the level of thermal resistance. This leads to a modification of the original model with degree days specified as a quadratic function of the resistance level. The implications of this formulation for the effect of using RIF's are

discussed. In the final subsection, both cost and degree days are formulated as general functions of resistance without specifying particular functional forms. By making some reasonable assumptions about the first and second derivatives of these functions, some general conclusions are drawn regarding the relationship between the magnitude of the RIF values and the level of the socially optimum standard.

To facilitate the presentation of these alternate forms of the model, a slightly different, more condensed system of notation will be used throughout this section. As in section 3, the objective of the model is to determine which level of thermal resistance is consistent with some minimum required indoor temperature for the least life-cycle cost. This optimum level of resistance is found by minimizing life-cycle heating-related costs (L) expressed as a function of thermal resistance (R). The model and explanations of the new notation are as follows:

Minimize with respect to R

$$L = K \cdot D \cdot (1/R) + C, \quad (4.1)$$

where

L = life-cycle heating-related costs of a unit of attic floor area,

$K = \text{UPW} \cdot P_e \cdot 24$,

D = the number of effective degree days, which in one variation of the model is expressed as a function dependent on the level of thermal resistance,

R = the thermal resistance of the attic floor, and

C = the total construction costs of a unit of attic floor area expressed as a function of thermal resistance.

4.1 ALTERNATIVE COST FUNCTIONS

As stated above, the first group of model variations maintains the original assumption of degree days being fixed and independent of resistance, while allowing alternative assumptions regarding the manner in which construction costs (C) depend on the level of thermal resistance. In section 3 we made the assumption that the per unit area construction costs of the attic portion of the building envelope are a linear function of the level of resistance. This assumption implies that each additional (or incremental) unit of resistance costs the same regardless of the level of total resistance.³³ In this subsection we will relax that linearity assumption

to allow for the case of rising incremental costs first by a quadratic function and then by cubic and higher-order functions. For the sake of completeness, we begin by restating the original model of section 3 using the new format given by expression (4.1) above.

4.1.1 Case I: A Linear Cost Function

Under the assumptions of linear costs and fixed degree days, the expression for life-cycle cost becomes

$$L = K \cdot D \cdot (1/R) + a + b \cdot R. \quad (4.2)$$

Differentiating with respect to R and setting the derivative equal to zero yields the following expression for the optimum resistance, R_o :

$$R_o = \left[\frac{K \cdot D}{b} \right]^{1/2}. \quad (4.3)$$

This implies that the standard is given by

$$U_o = \left[\frac{b}{K \cdot D} \right]^{1/2}. \quad (4.4)$$

Substituting $F \cdot K$ for K , where F is the RIF value, we can establish the relationship between the socially optimum standard U_o^* and the privately optimum one, U_o :

$$U_o^* = \left[\frac{b}{F \cdot K \cdot D} \right]^{1/2} = U_o \cdot \left[\frac{1}{F} \right]^{1/2}. \quad (4.5)$$

As was pointed out in section 3, this means that as the RIF value increases, the rate of thermal transmission allowed by the socially optimum standard decreases (i.e., greater levels of thermal resistance would be needed to meet the standard), but at a steadily diminishing rate.

With this formulation it is also possible to compare the relative impacts of employing RIF's in different climates. For the entire range of heating loads represented by the number of degree days (D), the introduction of a given RIF value has the *same percentage* impact on the rate of thermal transmission allowed by the optimum standards. This is because the two different values of U_o in equation (4.5) are being multiplied by the same value of $F^{-1/2}$, so that the percentage change is the same. By the same token, this implies that the absolute value of the impact of U_o^* is greater for warmer climates than for colder ones, because the base values of U_o are greater in the warmer climate.

This result is reversed, however, when one considers the relative impact of RIF's on the *annual amount* (rather than the rate per degree day) of energy consumption allowed by a socially optimum standard. A numerical example illustrates the point. Suppose the

³³ In the terminology of economists, this is equivalent to assuming that the marginal cost of resistance is constant.

values of the parameters b , K , and D in expression (4.4) were such that U_o equalled 0.10 in a particular region with a relatively warm climate. A colder climate with four times as many degree days would then require a U_o equal to $0.10/\sqrt{4}$ (or one half as high a rate of transmission), for the same values of b and K . Let us denote the extra annual energy savings per square foot of attic attributable to the use of RIF's in the warmer climate by ΔS_w and those in the colder climate by ΔS_c . Then we have

$$\Delta S_c = (1-F^{1/2}) \cdot (24) \cdot (4D) \cdot (0.10/\sqrt{4}), \text{ and}$$

$$\Delta S_w = (1-F^{1/2}) \cdot (24) \cdot (D) \cdot (0.10). \quad (4.6)$$

Forming the ratio of the colder climate savings to the warmer climate savings, and cancelling like terms in the numerator and denominator, we have

$$\frac{\Delta S_c}{\Delta S_w} = 4/\sqrt{4} = \sqrt{4} = 2. \quad (4.7)$$

Thus in comparing two different climates, one with *four* times as many degree days as the other, the extra annual energy savings attributable to using RIF's are *twice* as great for the colder climate than for the warmer one. It is important to note that this result holds for all RIF values greater than one.³⁴ This result can be stated in a more general form. If a colder climate has n times as many degree days as a warmer climate, the extra annual energy savings attributable to using a positive RIF to develop the standard for the colder climate would be $\sqrt{n}$ times as much as that for the warmer climate.

4.1.2 Case II: A Quadratic Cost Function

We now abandon the linear cost assumption in order to investigate the case in which unit area construction costs of the attic floor are formulated as a quadratic function of thermal resistance. The general form of a quadratic cost function is as follows:

$$C = a + b \cdot R + c \cdot R^2, \quad (4.8)$$

where a , b , and c represent fixed parameters. This formulation implies that the marginal or incremental cost of adding a unit of thermal resistance is no longer constant but steadily changes as more resistance is added. Since the more probable situation is that the

³⁴ If $F=1$, then $\Delta S_c = \Delta S_w = 0$ and the ratio becomes meaningless. If $F < 1$, then ΔS_c and ΔS_w are both negative, which implies that application of the RIF would allow higher rather than lower levels of energy consumption. In this latter case, the *decrease* in energy savings in the colder climate would be twice as much as the decrease in savings in the warmer climate.

marginal cost increases (rather than decreases), the parameter; c is assumed to be positive. Thus, the marginal cost rises at a constant rate equal to $2c$.³⁵ Moreover, to rule out the unlikely situation of a negative marginal cost, we assume $b \geq 0$. In terms of geometry, these restrictions on b and c mean that we are confining our analysis to the upward sloping portion of a U -shaped quadratic curve, that is, one which is concave upward.

Under the assumption of fixed degree days and quadratic costs, the expression for life-cycle cost takes on the following form:

$$L = K \cdot D \cdot (1/R) + a + b \cdot R + c \cdot R^2. \quad (4.9)$$

Differentiating this expression with respect to R and setting the result equal to zero yields the following cubic equation:

$$2c \cdot R_o^3 + b \cdot R_o^2 - K \cdot D = 0. \quad (4.10)$$

The expression for the optimum level of thermal resistance, R_o , can be found by applying the formula for the solutions to a cubic equation.³⁶ Unfortunately, this results in an expression too cumbersome to be of any use in interpreting the relationship between RIF's and the resulting optimum resistance.

For the special case of $b=0$, on the other hand, the explicit solution for R_o can be easily derived and interpreted. The implication of assuming $b=0$ is that marginal cost has no fixed component, but simply starts at zero and increases by $2c$ for every unit of resistance added.³⁷ Under the assumption, the following formula for R_o can be derived from expression (4.10):

$$R_o = \left[\frac{K \cdot D}{2c} \right]^{1/3}. \quad (4.11)$$

This implies that the maximum rate of thermal transmission allowed by the optimum standard is given by

$$U_o = \left[\frac{2c}{K \cdot D} \right]^{1/3}. \quad (4.12)$$

³⁵ By taking the first derivative of (4.8) we find the marginal cost (MC) equals $b + 2c \cdot R$. Thus MC rises with increasing R if c is positive, falls with increasing R if c is negative. Of course, if $c=0$, then $MC=b$ regardless of the value of R , which is equivalent to the linear cost case.

³⁶ Murray R. Spiegel, *Mathematical Handbook of Formulas and Tables* (Schaum's Outline Series; New York: McGraw-Hill, Inc., 1968), p. 32.

³⁷ The geometric interpretation of $b=0$ is that the MC straight line goes through the origin.

Substituting $F \cdot K$ for K , where F is the RIF value, we can establish the following relationship between the transmission rate allowed by the socially optimum standard, U_o^* , and that by the privately optimum standard, U_o :

$$U_o^* = \left[\frac{2c}{K \cdot D} \right]^{1/3} \cdot \left[\frac{1}{F} \right]^{1/3} = U_o \cdot \left[\frac{1}{F} \right]^{1/3}. \quad (4.13)$$

As with the linear cost case, this means that as the RIF value increases, U_o^* decreases, but at a steadily diminishing rate. There is, however, a significant difference between the two cases. Note that for this quadratic cost case U_o^* varies inversely as the cube root of F , whereas for the linear cost case, U_o^* varies inversely as the square root of F .³⁸ For example, the effect of a RIF value of 2 is to reduce the maximum rate of transmission allowed under the quadratic cost standard by only 20.6 percent, whereas we saw in section 3 that the effect of the same RIF value on the rate allowed under the linear cost standard would be a reduction of 29.3 percent. Thus, the higher-order cost function allows a smaller impact for RIF's on the rate of thermal transmission.

As with the linear cost case, it is possible to compare the relative impact of RIF's on the annual energy consumption allowed by the standard in different climates. A numerical example helps to illustrate the relative impacts. Suppose the values of the parameters c , K , and D in expression (4.13) were such that U_o equalled 0.10 in a particular region with a relatively warm climate. Then, a much colder climate with four times as many degree days would require a U_o equal to $0.10/4^{1/3}$ (or about 0.63 as high a rate of thermal transmission), for the same values of c and K . As before we can denote the extra annual energy savings per square foot of attic attributable to the use of RIF's in the warmer and colder climates by ΔS_w and ΔS_c , respectively. Then we have

$$\begin{aligned} \Delta S_c &= (1-F^{-1/3}) \cdot (24) \cdot (4D) \cdot (0.10/4^{1/3}), \text{ and} \\ \Delta S_w &= (1-F^{-1/3}) \cdot (24) \cdot (D) \cdot (0.10). \end{aligned} \quad (4.14)$$

Thus, the ratio of the colder to the warmer climate savings becomes

$$\frac{\Delta S_c}{\Delta S_w} = 4/4^{1/3} = 4^{2/3} \cong 2.52. \quad (4.15)$$

Thus, we can conclude that for a climate with four times as many degree days as another, the extra annual energy savings attributable to RIF's would be about 2.52 times as great. Again note that this relationship holds for all RIF values greater than one.³⁹ In general,

³⁸ See expression (4.5) above.

³⁹ See footnote 34 above.

this relationship means that for a colder climate with n times as many degree days as a warmer climate, the extra annual energy savings due to using a positive RIF value would be $n^{2/3}$ times as much as for the warmer climate.

4.1.3 Case III: Higher-Order Cost Functions

We now consider the implications of using cubic and even higher-order functions to represent the relationship between total construction costs and the level of thermal resistance. The general form of the functions we will analyze is

$$C = a + c \cdot R^q, \quad (4.16)$$

where the coefficient c is positive and the exponent, q , is a parameter (usually an integer) which specifies the order of the function.⁴⁰ For $q \geq 3$, this form means the marginal cost of resistance not only rises but rises at an increasing rate as R increases. In general, for given values of a and c , both total construction costs, C , and marginal costs rise more quickly, the greater the value of q (the higher the order of the function).

Under the assumptions of fixed degree days and the cost function of expression (4.16), life-cycle costs become

$$L = K \cdot D \cdot (1/R) + a + c \cdot R^q. \quad (4.17)$$

Following the same procedure used for Cases I and II, we can derive the following expression for the maximum rate of thermal transmission allowed by the socially optimum standard:

$$U_o^* = \left[\frac{q \cdot c}{K \cdot D} \right]^{1/(q+1)} \cdot \left[\frac{1}{F} \right]^{1/(q+1)} = U_o \cdot \left[\frac{1}{F} \right]^{1/(q+1)} \quad (4.18)$$

This relationship means that in general the higher the order of the cost function, the smaller will be the impact of a given RIF value in reducing the maximum rate of thermal transmission allowed by the standard. For example, we saw in Case II with a quadratic cost function that a RIF value of 2 would reduce the maximum rate by 20.6 percent. With a cubic cost function ($q=3$), however, this reduction would be a mere 15.9 percent.

For the case of a cubic cost function, the relative impact of using RIF's on annual energy consumption in different climates can be established. It turns out

⁴⁰ It might be noted that this functional form could be used to analyze the case in which total costs are a less than linear function of thermal resistance (e.g., $q=0.5$). The economic interpretation of this situation is that the marginal cost of resistance decreases as more is added.

that if a colder climate has n times as many degree days as a warmer climate, the ratio of extra energy savings in the colder climate to those in the warmer climate is equal to $n^{3/4}$. For example, a factor of four times as many degree days implies 2.83 times as much energy savings.

4.1.4 Comparison of Alternative Cost Functions

It is now appropriate to compare the alternative cost functions presented. They will first be compared in terms of the effects of various RIF values on the maximum rate of thermal transmission allowed by the socially optimum standard. Table 4.1 gives the ratio, U_o^*/U_o , for a range of RIF values and various cost functions. The ratios in the column entitled "linear" are the same as those in table 3.3 of section 3.

Several patterns emerge from an analysis of these ratios. In the first place, for all cost functions the ratio decreases as the RIF value increases, but does so at a diminishing rate.⁴¹ Secondly, for any given RIF value as one moves from lower to higher-order cost functions (reading from left to right across one row of the table), the ratios get larger and closer to unity. This implies that as q increases, the effect of RIF's in lowering the maximum rate of transmission decreases. Thirdly, a unit change in the RIF value has less of an effect on the ratios, the higher the order of the cost

⁴¹ This can also be shown in general by evaluating the signs of the first and second partial derivatives of U_o^* with respect to F in expression (4.18). As expected, the first derivative is negative, indicating the inverse relationship, and the second derivative is positive, verifying the diminishing effect.

function. For example, an increase in the RIF value from 2.00 to 2.25 yields a change of 0.040 for the linear cost case, while the same increase in the RIF leads to a change of only 0.031 for the quadratic cost case.

Another type of comparison can be made regarding the alternative cost functions. We can analyze the relative impact of using RIF's on annual energy consumption in different climates for all cost functions. If a colder climate has n times as many degree days as a warmer climate, the ratio of extra energy savings in the colder versus the warmer climate turns out to equal $n^{q/(q+1)}$, where q is the order of the cost function. Table 4.2 presents these ratios for a range of values of n and the various cost functions. For example, in a climate with twice as many degree days, RIF's would have a 41.4 percent greater impact on annual energy consumption with a linear cost function, but they would have a 58.7 percent greater impact with a quadratic cost function.

There are two general conclusions that can be drawn from these ratios. First, note that for any given value of n , the ratios increase as the order of the cost function (q) increases. This means that the energy-saving impact of having more degree days is greater for higher-order cost functions.⁴² The second point is that for all values for q the ratios increase as n

⁴² Note that this effect of increasing q gradually diminishes and approaches the limiting value of n as q gets arbitrarily large. That is,

$$\lim_{q \rightarrow \infty} n^{q/(q+1)} = n.$$

Table 4.1 RATIOS OF SOCIALLY OPTIMUM TO PRIVATELY OPTIMUM STANDARDS FOR VARIOUS RIF VALUES AND COST FUNCTIONS ^a

RIF Value	Cost Function			
	Linear ($q=1$)	Quadratic ($q=2$)	Cubic ($q=3$)	Quartic ($q=4$)
1.00	1.000	1.000	1.000	1.000
1.25	0.894	0.928	0.946	0.956
1.50	0.817	0.874	0.904	0.922
1.75	0.756	0.830	0.869	0.894
2.00	0.707	0.794	0.841	0.871
2.25	0.667	0.763	0.817	0.850
2.50	0.633	0.737	0.795	0.833
2.75	0.603	0.714	0.777	0.817
3.00	0.577	0.693	0.760	0.803

^a These ratios are calculated by the following relationship derived from expression (4.18):

$$U_o^*/U_o = F^{-1/(q+1)}$$

Table 4.2 RATIOS OF EXTRA ENERGY SAVINGS DUE TO RIF'S IN COLDER VERSUS WARMER CLIMATES, FOR VARIOUS COST FUNCTIONS ^a

Degree-Day Multiple (<i>n</i>)	Cost Function			
	Linear (<i>q</i> =1)	Quadratic (<i>q</i> =2)	Cubic (<i>q</i> =3)	Quartic (<i>q</i> =4)
1.00	1.000	1.000	1.000	1.000
1.50	1.225	1.310	1.355	1.383
2.00	1.414	1.587	1.682	1.741
2.50	1.581	1.842	1.988	2.081
3.00	1.732	2.080	2.280	2.408
4.00	2.000	2.520	2.828	3.031
5.00	2.236	2.924	3.344	3.624
6.00	2.450	3.302	3.834	4.193

^a The ratios of the extra savings are calculated using the following relationship:

$$\frac{\Delta S_c}{\Delta S_w} = n^{q/(q+1)}$$

increases. This simply means that the greater the difference between the colder and warmer climates, the greater would be the relative energy-saving impact of using RIF's. Moreover, the effect of a one unit change in *n* decreases as *n* increases. This means that the same difference in degree days leads to extra annual energy savings due to RIF's which are greater when comparing two relatively warm climates than when comparing two relatively cold ones.

This concludes our analysis of alternative cost functions. There are a host of other forms possible (e.g., trigonometric, logarithmic, exponential). Most of these would not lead to an explicit expression for U_o^* . Moreover, the family of polynomial forms which have been analyzed adequately represents the probable way in which unit area construction costs of the attic floor are expected to vary with the level of thermal resistance. There is a shortcoming, however, which all these functional forms share. They assume that costs vary continuously. Because glass fiber batts or blankets come in a limited number of thicknesses, it would be more accurate to have these construction costs vary discretely as more resistance is added. For the loose-fill type of insulation, on the other hand, the continuous assumption is quite realistic. Moreover, even for the case of limited sized batting, the continuous assumption is valid for establishing the general relationships between resistance costs, energy costs, degree days and RIF's on the one hand, and the socially optimum energy conservation standard, on the other. When the actual calculations are made to develop the standard, the discrete nature of these costs can be taken into account.

4.2 DEGREE DAYS AS A FUNCTION OF RESISTANCE

Up to this point we have maintained our original assumption that the number of degree days (*D*) associated with the heating requirements of a building is invariant with respect to the level of resistance (*R*). In fact, it is expected that as more units of thermal resistance are added to the building envelope, the number of degree days effectively contributing to the heating load will decrease. It is further expected that as *R* is increased, the rate at which *D* falls will diminish. These expectations suggest that degree days could be adequately represented by a quadratic function of resistance.⁴³

The reasoning leading to these expectations regarding the pattern of variation of degree days is best explained by distinguishing between the two links in the chain of causality from *R* to *D*: (1) an increase in resistance will cause the effective degree-day temperature base to decrease, (2) which, in turn, will lower the number of degree days in the heating season. Each of these links will be explained and illustrated in turn.

⁴³ For the sake of completeness, the life-cycle model was also analyzed for the case of degree days assumed to be a linear function of resistance. This assumption leads to an expression for R_o which would have a higher value than that which results from the fixed degree-day assumption. This result has the intuitive appeal that when the extra benefit of lowering the number of degree days is attributed to resistance, it makes sense to select a higher level of resistance than would otherwise have been chosen.

4.2.1 Degree-Day Temperature Base and Resistance

With regard to the first link, the effective degree-day temperature base is given by that critical temperature below which a supply of heat to the conditioned space is needed in order to maintain a given indoor temperature. This critical temperature is sometimes referred to as the balance point (B) and is generally less than that specified by the desired indoor winter temperature, because solar radiation and the normal activities of a household (lighting, hot water use, appliances, and body warmth) replace some of the heat being lost through the building envelope. Given an indoor temperature requirement and rates of solar gain and incidental internal heat generation, the lower the rate at which heat is being lost through the building envelope, the lower the balance point. This means that there is an inverse relationship between the balance point and the level of thermal resistance up to a limit determined by the rate of air infiltration in the building. The impact on the balance point of adding one unit of resistance, however, gradually diminishes as more units are added because the direct effect of more resistance on the rate of heat loss also

diminishes. This implies that unit increases in resistance lead to reductions in the balance point but at a decreasing rate.

This inverse relationship between resistance and the balance point can be illustrated with a numerical example. Suppose the occupants of a building with 3000 sq. ft. of envelope area having an R -value of 5 set the thermostat at 70° F. If the heat loss due to air infiltration is 200 Btu's per hour per degree of indoor-outdoor temperature difference, then an assumed balance point of 65° F implies that spontaneous heat gains from solar radiation and household activities equal 4000 Btu's per hour. That is, if the outdoor temperature were exactly 65° F, then the 4000 Btu's of spontaneous heat gains would just offset the heat losses due to conductance and infiltration so that the desired indoor temperature of 70° F would be maintained without heat from the furnace. Now by successively adding 5 more units of resistance to the original resistance level of R -5 we can calculate the effective balance point for each new level of resistance. The results of these calculations are presented in table 4.3. It is clear that as R is increased, B decreases. Moreover, note that the rate of decrease of B diminishes. For example, increasing R from 5 to

Table 4.3 EFFECTIVE BALANCE POINTS FOR VARIOUS LEVELS OF THERMAL RESISTANCE: HYPOTHETICAL EXAMPLE ^a

Thermal Resistance (R)	Balance Point (°F)
5	65.0
10	62.0
15	60.0
20	58.6
25	57.5
30	56.7
35	56.0
40	55.5
45	55.0
50	54.6
55	54.3
60	54.0
.	.
.	.
.	.
∞ ($U=0$)	50.0

^a The following assumptions underlie these calculations: (1) the envelope area (A) is 3000 sq. ft.; (2) the desired indoor temperature (T) is 70°F; (3) the spontaneous heat gain (H) from solar radiation and household activities is 4000 Btu's/hour; and (4) heat loss (I) due to air infiltration is 200 Btu/hour/degree of indoor-outdoor temperature difference. These parameter values are substituted into the following formula for calculating the balance point corresponding to each resistance level:

$$B = T - \left[\frac{H}{A/R + I} \right]$$

10 causes B to drop 3 degrees, whereas increasing R from 10 to 15 causes a drop of only 2 degrees. In fact, B approaches a theoretical limit of 50° F, corresponding to an infinite level of resistance (no heat losses due to conduction).

4.2.2 Degree Days and the Degree-Day Base

The second link in the chain of causality between resistance and degree days deals with the way in which these reductions in the balance point affect the actual number of degree days in particular climatic area. The pattern of this relationship is illustrated in table 4.4 with data for several representative cities. Note that for all the cities as the balance point drops the number of degree days decreases but at a slightly diminishing rate. For example, in Washington the one-degree shift from 65° to 64° would cause a 213 degree-day decrease, whereas the one-degree drop from 64° to 63° would cause a 208 degree-day decrease. This pattern continues until the one-degree drop from 51° to 50° causes only a 150 degree-day decrease.

4.2.3 Case IV: A Quadratic Degree-Day Function

Now it is possible to bring these two links together to establish the relationship between degree days and the level of thermal resistance. The data from table 4.4 can be combined with that in table 4.3 to plot curves representing degree days as functions of resistance. One such curve is shown in figure 4.1 for Washington, D.C. As is apparent from the shape of the curve, degree days decrease as the level of resistance increases. Moreover, the rate of decrease in degree days gradually diminishes. The pattern of the relationship shown in figure 4.1 can be represented reasonably well by expressing degree days as a quadratic function of thermal resistance:

$$D = d + e \cdot R + f \cdot R^2, \quad (4.19)$$

where d , the intercept is positive, f must also be positive to guarantee upward concave curvature, and e is negative because the slope is negative.⁴⁴

⁴⁴ Regression analysis of this quadratic relationship reveals that for the six cities of table 4.4, all the coefficients have the expected signs and are significantly different from zero at the 99 percent level of confidence. Moreover, the R^2 values for all six cities exceed 0.96.

Table 4.4 DEGREE DAYS CORRESPONDING TO VARIOUS BALANCE POINTS FOR SIX MAJOR U.S. CITIES^a

Balance Point (°F)	City					
	Chicago	N.Y.	Wash.	San Fran.	St. Louis	Mpls.
65	6191	4578	4164	3394	5225	8405
64	5928	4344	3942	3058	5002	8145
63	5667	4115	3725	2733	4784	7889
62	5413	3888	3515	2422	4571	7640
61	5170	3668	3310	2126	4365	7397
60	4930	3455	3110	1848	4165	7155
59	4698	3246	2917	1598	3970	6916
58	4475	3047	2726	1370	3782	6681
57	4256	2853	2542	1162	3598	6449
56	4043	2663	2360	977	3417	6221
55	3836	2482	2185	802	3239	5995
54	3636	2304	2015	645	3065	5772
53	3442	2135	1857	507	2892	5556
52	3255	1975	1709	387	2721	5342
51	3072	1824	1566	290	2554	5134
50	2899	1683	1430	217	2392	4933

^a These data are taken from computer calculations performed at the National Bureau of Standards by Edward A. Arens and William L. Carroll using Test Reference Year weather tapes. These tapes contain a particular year's climate records selected for each location from a population of 27 years of records. The selection procedure is described by Eugene Stamper, "Weather Data," *ASHRAE Journal*, Vol. 19, No. 2 (February 1977), p. 47.

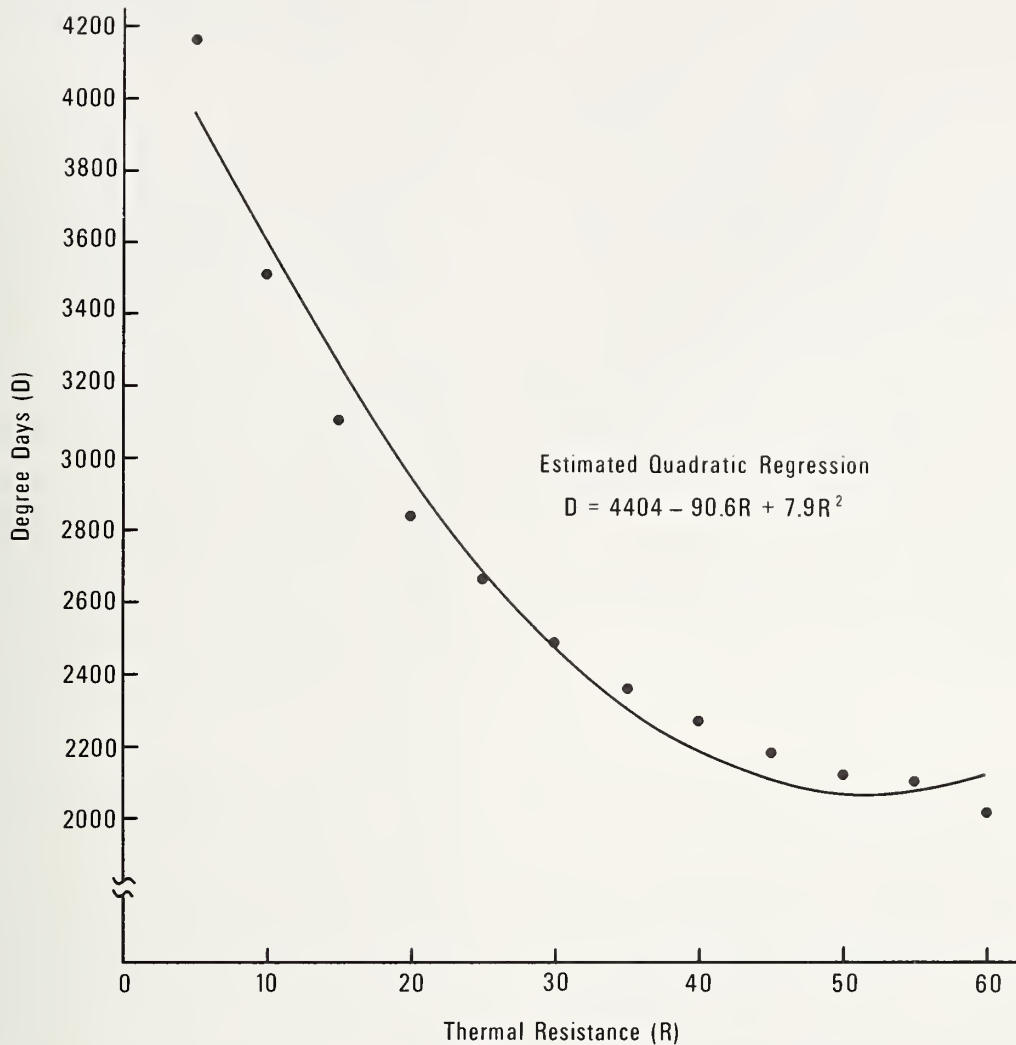


FIGURE 4.1 DEGREE DAYS AS A FUNCTION OF THERMAL RESISTANCE FOR A TYPICAL HOUSE IN WASHINGTON, D.C.

Now we can apply this assumption of quadratic degree days and maintain our original linear cost function to obtain the following expression for life-cycle cost:

$$L = K \cdot (d + e \cdot R + f \cdot R^2) \cdot (1/R) + a + b \cdot R. \quad (4.20)$$

Differentiating L with respect to R , solving for the optimum level of resistance, and inverting yields the following expression for the optimum rate of thermal transmission:

$$U_o = \left[\frac{b + f \cdot K}{d \cdot K} \right]^{1/2}. \quad (4.21)$$

When RIF's are introduced by substituting $F \cdot K$ for K in this expression, we obtain the maximum rate of

transmission allowed by the socially optimum standard:

$$U_o^* = \left[\frac{b/F + f \cdot K}{d \cdot K} \right]^{1/2}. \quad (4.22)$$

Unfortunately, expression (4.22) does not permit the separation of F which would be required in order to express the socially optimum transmission rate, U_o^* , as a function relative to the privately optimum rate, U_o . The best that can be done under these circumstances is to assess the general direction of the relationship between F and U_o^* by evaluating the sign of the first derivative. Thus, we have

$$\frac{\partial U_o^*}{\partial F} = -1/2 \left[\frac{b/F + f \cdot K}{d \cdot K} \right]^{1/2} \cdot \left[\frac{b}{d \cdot K} \right] \cdot \left[\frac{1}{F^2} \right] \quad (4.23)$$

Since it is assumed that additional units of resistance have a positive cost, we have $b > 0$. Moreover, since degree days are assumed to decrease at a decreasing rate, with increases in resistance, we have d and f both positive. Finally, since the only meaningful values of F and K are all positive, we know that the derivative is less than zero, which means that in general U_o^* is a decreasing function of F . That is, the higher the value of the RIF, the lower will be the maximum rate of thermal transmission allowed by the socially optimum conservation standard. This is the same general conclusion we have seen with the previous formulations of the model. The higher RIF value implies a higher social value being imputed to energy, which in turn justifies more investment in energy conservation so as to lower the rate of energy consumption. On the other hand, whether U_o^* decreases at a diminishing rate as it does in Cases I through III can only be determined by evaluating the sign of the second derivative. Unfortunately, it turns out that this sign cannot be unambiguously determined without actually specifying the magnitudes of the variables in expression (4.23).

4.3 CASE V: THE GENERAL OPTIMUM STANDARDS MODEL

So far in Cases I through IV we have assumed alternative specific functional forms to represent the manner in which the level of thermal resistance may affect the building envelope construction costs on the one hand, and the number of degree days on the other hand. Rather than assuming particular algebraic forms for the cost and degree-day functions, we now employ general functional forms to represent these relationships. That is, we simply state that the number of degree days is a function of the level of resistance, $D(R)$, and similarly that cost is a function of resistance, $C(R)$. Thus, the expression for life-cycle cost becomes

$$L = K \cdot D(R) \cdot (1/R) + C(R). \quad (4.24)$$

Moreover, it is reasonable to impose certain restrictions on the first and second derivatives of the functions $D(R)$ and $C(R)$. These restrictions are stated and briefly interpreted in table 4.5. The rationale behind restrictions 1 and 2 regarding degree days was already discussed under Case IV (subsec. 4.2). Restriction 3 simply means that the addition of one unit of resistance increases rather than decreases the total amount spent on resistance (i.e., the marginal cost is positive). Restriction 4 implies that as more units of resistance are added, each successive unit costs more or the same as the previous one.

Table 4.5 RESTRICTIONS ON THE FIRST AND SECOND DERIVATIVES OF $D(R)$ AND $C(R)$

Restriction	Interpretation
1. $D'(R) < 0$	D is a decreasing function of R .
2. $D''(R) > 0$	D decreases at a decreasing rate.
3. $C'(R) > 0$	C is an increasing function of R .
4. $C''(R) \geq 0$	C increases at an increasing or constant rate.

When the derivative of expression (4.24) with respect to R is set equal to zero, we obtain

$$K \cdot [R_o \cdot D'(R_o) - D(R_o)] + R_o^2 \cdot C'(R_o) = 0. \quad (4.25)$$

As before, the RIF value can be introduced into this expression by substituting $F \cdot K$ in place of K . Although the resulting expression does not permit the explicit solution for the socially optimum level of resistance R_o^* , it is possible to determine the general direction of the effect of RIF's upon R_o^* and in turn upon its inverse, U_o^* . By employing the implicit function rule of calculus,⁴⁵ we can find the derivative of R_o^* with respect to F :

$$\frac{dR_o^*}{dF} = \frac{K[D(R_o^*) - R_o^* D'(R_o^*)]}{F \cdot K \cdot R_o^{*2} D''(R_o^*) + 2R_o^* C'(R_o^*) + (R_o^*)^2 \cdot C''(R_o^*)}. \quad (4.26)$$

Using the restrictions specified in table 4.5 and the fact that F , K , $D(R)$, and R_o^* are all positive, it can be seen that the entire expression is greater than zero. This means that the higher the RIF value introduced into the standard setting process, the greater the level of thermal resistance required to meet that standard.

This result can be restated in terms of the effect of RIF's on the maximum rate of thermal transmission allowed by the socially optimum standard. What is needed is the sign of the derivative of U_o^* with respect to F .

Since in general U is the reciprocal of R , we have

$$U_o^* = 1/R_o^*. \quad (4.27)$$

Differentiating, we have

$$\frac{dU_o^*}{dR_o^*} = -1/R_o^{*2} < 0. \quad (4.28)$$

⁴⁵ The implicit function rule states that for an implicit function of two variables $G(x, y)$,

$$\frac{dy}{dx} = - \frac{\partial G / \partial x}{\partial G / \partial y}.$$

See Jack R. Britton, *Calculus* (New York: Holt, Rinehart and Winston, 1961) p. 414.

By the chain rule,⁴⁶ we know that

$$\frac{dU_o^*}{dF} = \left[\frac{dU_o^*}{dR_o^*} \right] \cdot \left[\frac{dR_o^*}{dF} \right]. \quad (4.29)$$

From expression (4.28) the bracketed term on the left is negative and from our discussion of expression (4.26) the term on the right is positive. Thus, the product is negative and we can conclude that the use of higher RIF values will lead to the selection of a lower maximum rate of thermal transmission allowed by the socially optimum standard.

It would be possible to investigate the second derivative of R_o^* with respect to F to discover whether the effect of RIF's diminishes or increases as higher RIF values are introduced. Unfortunately, however, the expression for the second derivative contains third-order derivatives of the degree-day and cost functions. Without actual empirical work, it would be meaningless to attempt to make assumptions regarding the signs of these third-order derivatives. Hence, the sign of the second derivative of R_o^* with respect to F could not be established.

Comparison of these results of the general model with those of the earlier, more specific model formulations reveals the same basic conclusion: the higher the RIF value used in deriving the socially optimum standard, the lower will be the corresponding maximum rate of thermal transmission allowed by that standard, other things being equal. On the other hand, while for Cases I through III (fixed degree days) we were able to conclude that this effect of higher RIF values tends to diminish, we were unable to reach such a conclusion for Cases IV (quadratic degree days) and V (the general model).

⁴⁶ The chain rule for derivatives simply states that

$$\frac{dy}{dx} = \frac{dy}{du} \cdot \frac{du}{dx}.$$

See Spiegel, *Mathematical Handbook of Formulas and Tables*, p. 53.

Facing page: *Incorporating energy-conserving features into new buildings is usually less costly than adding them to existing buildings such as these townhouses.*



5. SUMMARY, CONCLUSIONS AND FURTHER RESEARCH

This final section offers a brief summary of the report and presents the conclusions regarding the likely effects RIF's would have on the energy conservation performance standard. The section closes with several suggestions for further research.

5.1 SUMMARY

Our purpose has been to analyze the effects of using RIF's in the development of socially optimum energy conservation performance standards for buildings. We

have discussed the various types of standards and the Energy Conservation and Production Act of 1976, which calls for the development of such a conservation performance standard. The language of this Act led us to concentrate our analysis on the effects of RIF's on an optimum standard, that is, a standard which reduces energy use to the extent that is economically justifiable while maintaining the habitability requirements of building occupants. The costs considered in such a standard include all expenditures occurring over the life of the building which relate to the energy uses governed by the standard—both first

costs, such as for insulation or storm windows, and recurring annual energy costs. These cost items are put on a time-equivalent basis by discounting the future items to their present values. The process of minimizing these life-cycle costs implies a trade-off between expenditures for energy conservation and expenditures for energy. Thus, the value of energy used in the analysis is critical in determining the optimum standard.

Section 2 showed how the actual price paid for energy may not necessarily reflect its true value to society. Some of the possible reasons for a divergence between the actual price and the social value of energy were presented. These reasons include the presence of unit taxes or of monopoly power, environmental effects due to production or consumption, the desire for national economic independence, the existence of price controls such as those on natural gas, and inadequate information about the long-run scarcity of exhaustible energy resources. Because of this likely divergence between actual energy prices and their social values, it is necessary to adjust the actual prices before using them to determine the socially optimum conservation standard. RIF's provide a method of making such an adjustment.

Section 3 began by discussing two alternative methods of formulating RIF's: (1) as a quantity multiplier; or (2) as a price or value multiplier. Then, a life-cycle cost minimization model was presented for determining the economically optimum level of thermal resistance in a building component such as the attic floor. Because of the exactly inverse relationship between resistance and the rate of thermal transmission, this model also determines the optimum rate of transmission which forms the basis for the optimum component performance standard itself. RIF's were introduced into this model so that the socially optimum standard (using RIF's) could be compared with the privately optimum standard (without RIF's). The relationship between the social and private standards was derived and analyzed. This analysis has several limitations. In the first place, it is addressed to component performance standards rather than building performance standards. As noted below in the suggestions for further research, the proper analysis of the effect of RIF's on building performance standards will be possible only after the energy-flow interactions between building components are adequately modeled. A second limitation is that this analysis focuses on a particular component, insulation in the building envelope. On the other hand, the same type of direct relationship found to exist between the social value of energy and the optimum level of thermal resistance is expected to hold for the performance characteristics of other building components such as space heating and cooling equipment, illumination, and water

heaters. Finally, for the particular component analyzed, the restrictive assumptions made regarding envelope construction costs and degree days may be violated under actual conditions.

Section 4 responded to this last limitation of the analysis by generalizing the cost minimization model. Four alternative sets of assumptions were developed and the corresponding formulas for the optimum standard were derived. Then, RIF's were introduced into these models and the effect of using RIF's was analyzed in terms of the amount of energy saved. The additional energy savings due to RIF's were also studied in relation to the number of degree days in the climate region.

5.2 CONCLUSIONS

The major conclusions of this report fall into three areas: (1) the appropriate method of formulating RIF's; (2) the potential effect RIF's would have on energy consumption in buildings; and (3) the effect of using RIF's on the economic efficiency of the selected energy conservation standard. These conclusions are presented in turn.

5.2.1 Proper Formulation of RIF's

We conclude that the appropriate method of formulating RIF's is as a price multiplier rather than as a quantity multiplier. The application of a quantity multiplier RIF results in impact numbers which would serve well to compare alternative energy types. Because these impact numbers are not denominated in dollars, however, they would be unsuitable for determining the economic balance between energy and nonenergy resources. To achieve such a balance, a common basis for comparison is needed. The price multiplier formulation provides this common denominator because the RIF value converts the actual price paid for the energy to its corresponding social price. The resulting social price remains denominated in dollars and thus, is comparable with the values of nonenergy resources. Thus, with price multiplier RIF's an economic trade-off can be established between the proper amount of a particular type of energy and the appropriate level of insulation.

5.2.2 The Energy Consumption Effect

In general, it was found that the introduction of RIF's would have a restraining influence on the energy consumption of new buildings. The most probable situation is that price multiplier RIF values would be greater than one (that is, the social value of energy is most likely greater than the price paid for energy). This is because those factors which cause the social

price to be higher than the actual price (environmental effects, price controls, and the national desire for economic independence) are likely to outweigh the other factors (unit taxes and monopoly power).

We can indicate the order of magnitude of the additional energy savings that might result from the use of RIF's in determining the standard for the case of natural gas. The natural gas used to heat buildings in the U.S. is either produced domestically or is imported. Almost all of the imported gas purchased by the major interstate pipeline companies comes from Canadian and Mexican sources, although small amounts of liquified natural gas (LNG) have begun to be imported. Because of the current price controls on domestically produced gas, these interstate pipeline companies pay considerably less for domestic than for imported gas. For the year ending September 1977, the weighted average price for gas purchased from domestic producers was \$0.67/MCF, while that for Canadian and Mexican gas was \$1.94/MCF.⁴⁷ Thus, two very different prices exist in separate markets for the same energy resource. This price differential is expected to be at least partially maintained at the retail level. As a result, if an energy conservation standard were based on the retail price charged by a local distributor using only domestic gas, the value of the energy saved would be understated. This is because whatever gas is saved through conservation makes possible an equal reduction in costly gas imports. To correct for this undervaluation, a RIF could be used equal to the ratio of the two retail prices. Assuming for the moment that retail gas prices remain proportional to the wellhead prices paid at the source, the same RIF value would be given by the ratio of the two wellhead prices. Thus, $RIF = 1.94/0.67 = 2.9$. At the other extreme, retail prices could be assumed to exceed their respective wellhead prices by a given dollar amount needed to cover the average costs of transport and distribution. This average mark-up can be roughly estimated at \$1.78/MCF.⁴⁸ Adding this amount to both wellhead prices and forming a ratio, we obtain a lower estimate for the RIF value, 1.5.

⁴⁷ U.S. Department of Energy, Energy Information Administration, "September 1977 Interstate Gas Prices and Financial Data," *Energy Data Reports*, January 13, 1978, Table 1, p. 4.

⁴⁸ The average retail price of natural gas for twenty major Standard Metropolitan Statistical Areas in October 1977 was about \$2.57/MCF, as reported in U.S. Department of Labor, Bureau of Labor Statistics, "Retail Prices and Indexes of Fuels and Utilities: Residential Usage," November 1977, p. 6. The average wellhead price including both domestic and imported gas was \$0.79/MCF for the year ending September 1977, as reported in U.S. Department of Energy, Energy Information Administration, "September 1977 Interstate Gas Prices and Financial Data," *Energy Data Reports*, January 13, 1978, Table 1, p. 4.

Introducing these two RIF values into expression (3.5) for the socially optimum standard, we find that the use of RIF's would lower the maximum rate of thermal transmission and hence, the annual energy consumption for space heating allowed by the standard by between 18.4 percent and 41.3 percent from what they would have been without RIF's. Smaller reductions, 12.6 percent and 29.9 percent, in the optimum rate of transmission result from the same RIF values of 1.5 and 2.9, respectively, when the cost function is assumed to be quadratic rather than linear. Finally, with a cubic cost function, the same RIF values lead to reductions of between 9.6 percent and 23.4 percent in the maximum rate of thermal transmission allowed by the socially optimum standard.

It was also found that the energy consumption effect of introducing RIF's depends on the severity of the climatic heating load. That is, the greater the number of degree days in an area, the greater will be the additional energy saved due to the introduction of RIF's. More specifically, for the linear cost model it was found that doubling the number of degree days leads to a 41.4 percent increase in the amount energy saved from RIF's. On the other hand, when envelope construction costs are assumed to be a quadratic function of the level of thermal resistance, it turns out that doubling the number of degree days leads to a 58.7 percent increase in RIF-induced energy savings. In general, this impact of degree days on the energy savings due to RIF's, steadily increases as the order of the cost function increases.

The ability to use a particular RIF value to find the corresponding percentage reduction in the energy consumption allowed by the standard is limited to Cases I through III (assuming fixed degree days) of the optimum standards determination model. For the other cases we are able to reach conclusions only regarding the general direction of the relationship between RIF values and the allowable energy consumption level. That is, for both the case in which degree days are assumed to be quadratic (Case IV) and the case in which degree days and costs were written as general functions of thermal resistance (Case V), we can conclude that the higher the RIF value used in determining the socially optimum standard, the lower (i.e., more restrictive) will be the maximum allowable energy consumption level specified in that standard. This makes intuitive sense because a higher RIF value implies a higher social value of energy, given the actual private price paid for it. It seems reasonable for society to recommend lower consumption levels for those resources which are valued more dearly.

5.2.3 The Economic Efficiency Effect

Our conclusion is that the use of RIF's will improve the economic efficiency (from the national standpoint)

of an energy conservation standard based on the actual private prices paid for energy. As we have seen in section 2, in order to reflect the national viewpoint, a standard should be based on the social values of energy types, which are equivalent to the product of the private prices times the corresponding price multiplier RIF values. Using the private rather than the social prices of energy results in an incorrect choice of the standard—one that is not socially optimum. This deviation of the privately optimum from the socially optimum standard can be termed economically inefficient because an opportunity for a net economic gain to society is being foregone. That is, the use of a RIF value greater than one will lead to an additional reduction in energy consumption (over and above that of a privately optimum standard) whose social value exceeds that of the additional thermal resistance required to achieve it.

This net gain in economic efficiency (i.e., the value of additional energy savings less the cost of achieving them) which results from the use of RIF's is illustrated geometrically and derived algebraically in the appendix. The geometric measure is denominated in the same units as the annual energy consumption for space heating attributable to a square foot of the building envelope. The change in envelope construction costs due to the use of RIF's is converted to equivalent units of annual energy consumption by dividing by the social price of energy and the uniform present worth factor.⁴⁹ This equivalent value of construction costs can then be combined with the change in annual energy consumption due to the use of RIF's. In the case of a RIF value greater than one, the additional construction costs are subtracted from the additional annual energy savings to arrive at the net efficiency gain. In the case of a RIF value less than one, the additional energy consumption is subtracted from the additional construction cost savings to yield the net gain in economic efficiency.

An algebraic measure of the net gain in economic efficiency from using RIF's is also derived in the appendix. This measure is the amount by which the life-cycle heating-related cost under the privately optimum standard exceeds that under the socially optimum standard. The energy consumed under both standards is evaluated at its social value. It is shown that for all RIF values (other than unity), there is a positive net gain in economic efficiency from using RIF's. That is, present value life-cycle social costs are always lower with RIF's than without them. In addition, for a typical house in a moderate climate this cost reduction is estimated to be \$58.20 for a RIF value of 1.5, and \$569.10 for a RIF value of 2.9.

⁴⁹ This makes annual energy consumption the *numeraire*.

5.3 SUGGESTIONS FOR FURTHER RESEARCH

There are two major areas related to RIF's in which further research is needed. The first and most obvious need is for the actual development of empirical estimates for RIF's. This report has suggested that the most useful formulation for RIF's is as price multipliers equivalent to the ratio of the social price of the energy type to its actual price. Section 2 briefly outlined the nature of those factors which cause the actual price paid for energy to deviate from its true social value. What remains to be done is: (1) to develop workable models which adequately reflect how each of those factors operated in reality; (2) to apply those models to derive empirical estimates for the magnitude and direction of each type of price-distorting factor; (3) to employ these empirical estimates to arrive at an overall numerical value for the social price of each energy type; and (4) to divide this social value by its corresponding actual price to obtain the price multiplier RIF value.⁵⁰

The second area which requires further research is that of the relationship of RIF's to building performance standards. The analysis of sections 3 and 4 was carried out using models to develop component performance standards for building envelope characteristics as they relate to space heating requirements. A full understanding of the relationship between RIF's and energy conservation performance standards will only be possible after the model for determining optimal building energy performance, which is currently being developed at NBS, has been completed. This model is expected to incorporate the many energy-flow interactions which occur among the various components of a building. If this effort is successful, it will be possible to analyze the economic trade-offs between interrelated components. Moreover, the model should be able to take explicit account of the changes in the degree-day base which result from energy conservation techniques. This model should be able to determine the socially or privately optimum energy performance of buildings by basing the economic optimization routine on the social or private values of energy types, respectively. Thus, the effects of using RIF's in developing a building performance standard would be determined by directly comparing a standard based on the socially optimum performance with one based on the privately optimum performance.

⁵⁰ One attempt to develop a system of energy resource shadow prices similar in concept to RIF's is being made at Brookhaven National Laboratory. See Harold Abilock, *et al.*, *A Study to Assess the Application of Shadow Pricing Techniques to National Energy Resource Planning*, Year 1 Final Report (Upton, NY: Brookhaven National Laboratory, June 1976).

REFERENCES

1. Abilock, Harold, *et al.* *A Study to Assess the Application of Shadow Pricing Techniques to National Energy Resource Planning*, Year 1 Final Report. Upton, N.Y.: Brookhaven National Laboratory, June 1976.
2. Arad, Uzi; Smernoff, Barry J.; and ben-Shaber, Haim. *American Security and the International Energy Situation*. 4 Vols. Croton-on-Hudson, N.Y.; Hudson Institute, April 1975.
3. ASHRAE Standard 90-75: *Energy Conservation in New Building Design*. New York: American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE), 1975.
4. Brannon, Gerard M. (Ed.) *Studies in Energy Tax Policy*. Cambridge, Mass.: Ballinger Publishing Company, 1975.
5. Britton, Jack R. *Calculus*. New York: Holt, Rinehart and Winston, 1961.
6. Coad, William J. "Section 12: Toward a More Effective Use of Energy Resources." *ASHRAE Journal*, Vol. 19, No. 5 (May 1977), pp. 32-33.
7. Fisher, Anthony C., and Peterson, Frederick M. "The Environment in Economics: A Survey." *Journal of Economic Literature*. Vol. 14, No. 1 (March 1976), pp. 1-33.
8. Haefele, Edwin T. (Ed.) *The Governance of Common Property Resources*. Baltimore: The Johns Hopkins University Press, 1974.
9. Hannon, B. M., *et al.* *Energy Use for Building Construction*. Progress Report, March 1, 1976-August 1, 1976 (Center for Advanced Computation, Illinois University, Urbana, August 1976).
10. Hoffman, Kenneth C. "Some Comments on Energy Accounting." Paper presented at the panel discussion on Energy, Environment and Economics, 68th Annual Meeting, American Institute of Chemical Engineers, November 1975. (Available as BNL 2567 from the National Technical Information Service.)
11. House of Representatives 12169, "Energy Conservation and Production Act." Public Law 94-385 (August 14, 1976).
12. Huettner, David A. "Net Energy Analysis: An Economic Assessment." *Science*, Vol. 192 (April 9, 1976), pp. 101-104.
13. Jones, Robert R. "Resource Impact Factor (RIF) Approach to Optimal Use of Energy Resources." *ASHRAE Journal*, Vol. 18, No. 18 (October 1976), pp. 15-18.
14. Leftwich, Richard H. *The Price System and Resource Allocation*. 3rd ed. New York: Holt, Rinehart, and Winston, 1966.
15. Lin, Steven A. Y. (Ed.) *Theory and Measurement of Economic Externalities*. New York: Academic Press, 1976.
16. Little, Ian M. D., and Mirrlees, James A. *Manual of Industrial Project Analysis in Development Countries*. Vol. II: Social Cost Benefit Analysis. Paris: Development Centre of the Organisation of Economic Co-Operation and Development, 1968.
17. Mansfield, Edwin. *Microeconomics: Theory and Applications*. New York: W.W. Norton & Company, 1970.
18. Oklahoma University Science and Public Policy Program. *Energy Alternatives: A Comparative Analysis*. Springfield, Va.: U.S. Dept. of Commerce, National Technical Information Service, 1975.
19. Petersen, Stephen R. "Economic Optimization in the Energy Conservation Design of Single-Family Housing." *ASHRAE Transactions*, Vol. 82, Part I, 1976.
20. Petersen, Stephen R. *Retrofitting Existing Housing for Energy Conservation: An Economic Analysis*. Building Science Series 64. Washington, D.C.: U.S. Department of Commerce, 1974.
21. Phipps, Harry H. "The RUF Concept as an Energy Measurement Tool." *ASHRAE Journal*, Vol. 18, No. 5 (May 1976), pp. 28-30.
22. Sassone, Peter G. "Shadow Pricing in CBA: Mathematical Programming and Economic Theory." *The Engineering Economist*, Vol. 22, No. 3 (Spring 1977), pp. 219-233.
23. Solow, Robert M. "The Economics of Resources or the Resources of Economics." *American Economic Review*, Vol. 64, No. 2 (May 1974), pp. 1-14.
24. Spiegel, Murray R. *Mathematical Handbook of Formulas and Tables*. Schaum's Outline Series. New York: McGraw-Hill, Inc., 1968.
25. Staaf, Robert J., and Tannian, Francis X. (Eds.) *Externalities: Theoretical Dimensions of Political Economy*. New York: Dunellen Publishing Company, Inc., No date.
26. Stamper, Eugene. "Weather Data." *ASHRAE Journal*, Vol. 19, No. 2 (February 1977), p. 47.
27. U.S. Department of Energy, Energy Information Administration, "September 1977 Interstate Gas Prices and Financial Data," *Energy Data Reports*, January 13, 1978.
28. U.S. Department of Labor, Bureau of Labor Statistics, "Retail Prices and Indexes of Fuels and Utilities: Residential Usage," November 1977.

APPENDIX

ECONOMIC EFFICIENCY EFFECTS OF RIF'S

As was mentioned in section 5, the use of RIF's leads to a conservation standard with greater economic efficiency than the standard developed without RIF's. This is because the social value of the extra energy saved by using RIF's exceeds the additional cost required to save it. The purpose of this appendix is to present both geometric and algebraic measures of this net gain in economic efficiency due to the use of RIF's.

A.1 A GEOMETRIC MEASURE OF ECONOMIC EFFICIENCY

Figure A.1 illustrates the physical trade-off possibilities between the level of thermal resistance (R) and the corresponding annual energy consumption (A) required to replace the heat lost through one square foot of attic floor surface for a given climate and

desired indoor temperature level. The curve, TT' , is drawn as an exact rectangular hyperbola because A is inversely proportional to R according to the following expression:

$$A = (DD \cdot 24)/R \quad (A.1)$$

where DD is a parameter representing the number of degree days which is determined by the given climate and indoor temperature. For convenience, DD is taken to be a fixed parameter, as was assumed for the model developed in section 3. The alternative assumption of quadratic degree days discussed as Case IV in section 4 would not change the basic analysis, but only slightly alter the position, slope, and curvature of the relationship. It should be noted that an infinite number of combinations of R and A are available which satisfy the indoor temperature requirements and climatic conditions specified. That is, one can achieve the desired indoor temperature by using energy at a high annual rate with little thermal resistance, or by using less energy with more resistance. Which of the many combinations of R and A should be chosen depends on the cost of the energy relative to that of thermal resistance.

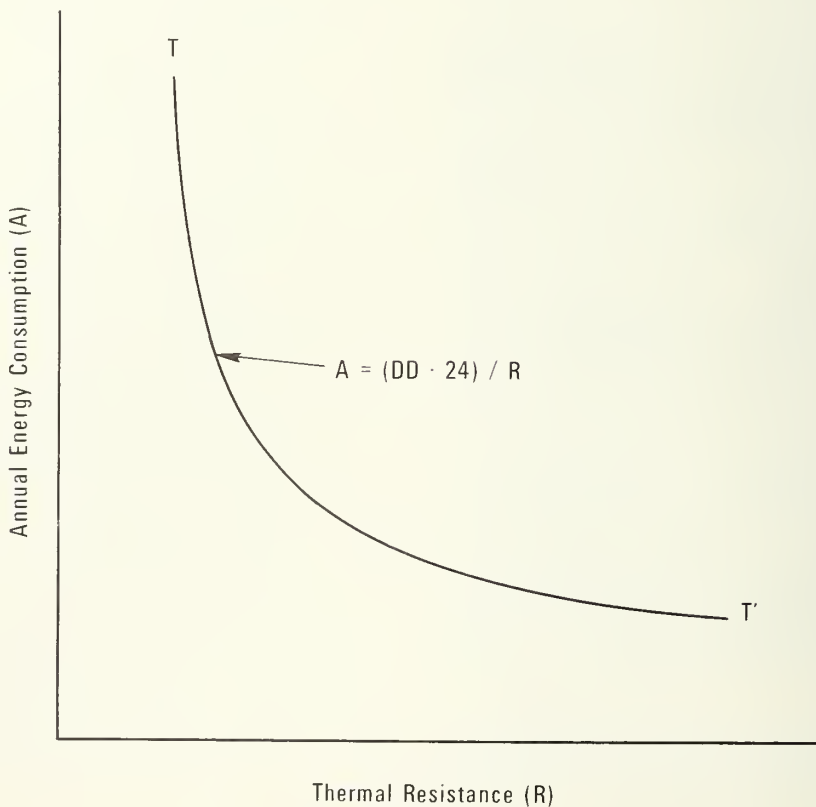


FIGURE A.1 TRADE-OFF CURVE BETWEEN ENERGY CONSUMPTION AND
THERMAL RESISTANCE FOR GIVEN CLIMATE AND INDOOR TEMPERATURE

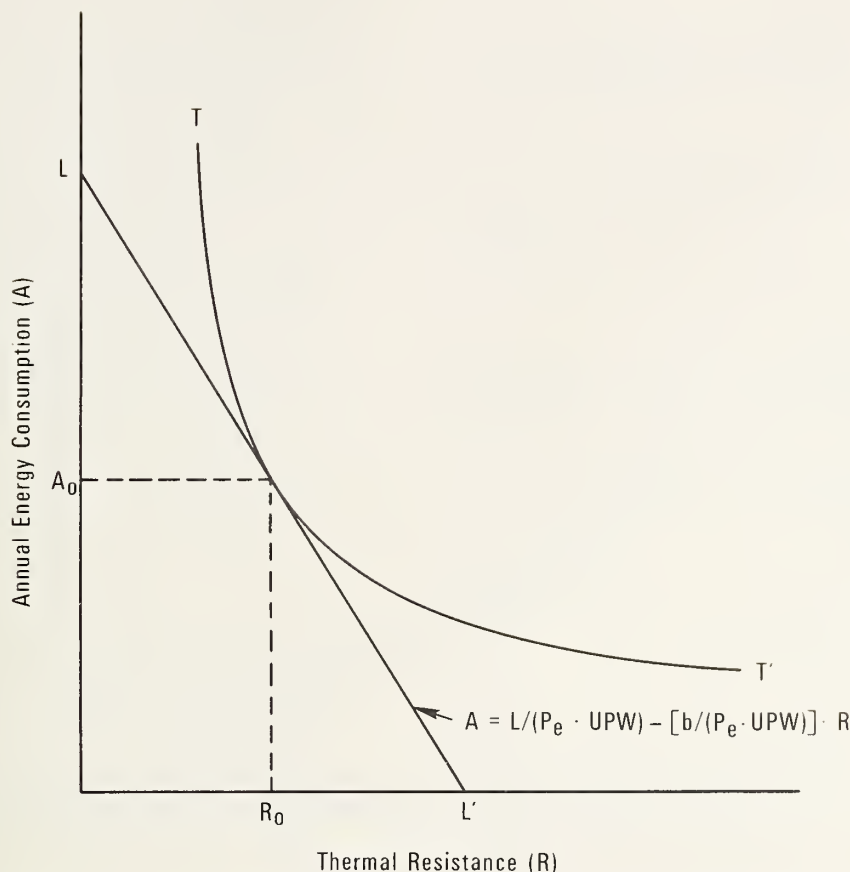


FIGURE A.2 PRIVATELY OPTIMUM ENERGY CONSUMPTION RATE (A_0)

Figure A.2 has the same trade-off curve, TT' , as shown above but introduces the concept of relative costs using the straight line, LL' .¹ This is called an isocost line because it represents all those possible combinations of A and R which lead to the same total present value of life-cycle heating-related costs, given the price of energy (P_e) and of resistance (b) and the uniform present worth factor (UPW). The algebraic formula for this line is given by

$$L = (P_e \cdot UPW) \cdot A + b \cdot R, \quad (A.2)$$

where L is a parameter representing the total present value of life-cycle heating-related costs.² This equation

can be rewritten to express A as an explicit function of R so that the intercept and slope can be clearly seen:

$$A = L / (P_e \cdot UPW) - [b / (P_e \cdot UPW)] \cdot R. \quad (A.3)$$

By varying the value of the parameter L , the A -axis intercept is changed so that the isocost line can be lowered or raised. The particular isocost line drawn in figure A.2 is just tangent to the trade-off curve TT' , which means that the value of L chosen is the lowest possible life-cycle cost which will still satisfy the indoor temperature requirements and climatic conditions given by TT' . Hence, the values A_0 and R_0 , given by the point of tangency can be considered optimum for the particular ratio of relative prices given by the slope, $b / (P_e \cdot UPW)$. Since the actual price paid for energy, P_e , was used rather than the social price, $P_e \cdot RIF$, it can be said that A_0 represents the rate of annual energy consumption which would be embodied in the privately optimum conservation standard.

In figure A.3, two more isocost lines have been added, both of which have the same slope, $b / (P_e \cdot RIF \cdot UPW)$, based on the social price of energy. The first line MM'

¹ If thermal resistance costs are assumed to be a quadratic or cubic rather than a linear function of the level of resistance, then LL' would be concave downward rather than a straight line.

² This formulation assumes there is no fixed cost component for thermal resistance. The inclusion of such fixed costs would unnecessarily complicate the argument without altering the conclusion.

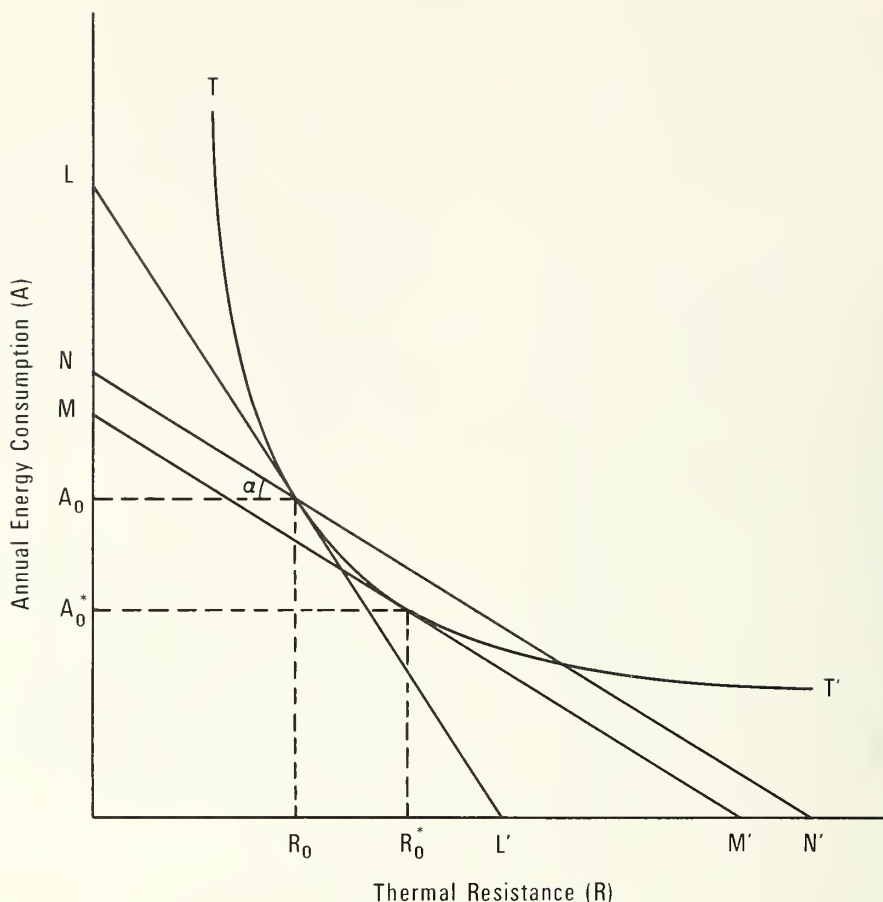


FIGURE A.3 SOCIALLY OPTIMUM ENERGY CONSUMPTION RATE (A_0^*) AND THE NET EFFICIENCY GAIN FROM USING RIF'S ($N-M$)

is drawn to be tangent to the trade-off curve TT' so that the value A_0^* at the point of tangency is interpreted as the socially optimum rate of annual energy consumption embodied in the standard. The second line NN' is drawn parallel to MM' by using the same slope, but it is made to go through the original point of tangency of isocost line LL' with trade-off curve TT' . This construction allows us to compare the life-cycle heating-related cost of the socially optimum standard with that of the privately optimum standard. The former is given by M and the latter by N , both found on the A axis. These cost figures are both denominated in units of annual energy consumption and represent the sum of the energy use plus the thermal resistance cost, with the latter being converted to equivalent energy units by division by the relative social price of energy.³

³ This procedure means that annual energy consumption serves as the *numeraire*.

The proof that N represents the life-cycle heating-related cost under the privately optimum standard is demonstrated in the following steps:

1. A_0 = the energy use under the standard.
2. R_0 = the resistance used under the standard.
3. To sum these we can convert the units of R_0 to their equivalent energy units using the relative price ratio based on the social price of energy. Thus, life-cycle cost measured in energy units equals $A_0 + [b/(P_e \cdot \text{RIF} \cdot \text{UPW})] \cdot R_0$.
4. Now the tangent of the angle α in figure A.3 is equivalent to the absolute value of the slope of line NN' , which we know to be $b/(P_e \cdot \text{RIF} \cdot \text{UPW})$.
5. But by definition, $\tan \alpha = (N - A_0)/R_0$.
6. Thus, $N = A_0 + (\tan \alpha) \cdot R_0 = A_0 + [b/(P_e \cdot \text{RIF} \cdot \text{UPW})] \cdot R_0$, which combined with Step 3 shows that N represents life-cycle cost denominated in equivalent units of annual energy consumption.

Similarly, M can be shown to represent the life-cycle heating-related cost under the socially optimum standard. Thus, we can conclude that the net gain in economic efficiency is given by $N-M$, which represents the amount by which the social value of the extra energy saved by using RIF's exceeds the additional social cost required to save it.

It should be noted that MM' and NN' were drawn under the assumption that the RIF value is greater than one. If the RIF value for a particular fuel type happens to be less than one, then these lines would have a slope steeper than that of LL' . The same procedure should be followed for measuring the net gain in efficiency that would result from using RIF's.

As already noted, this analysis was carried out using a straight isocost line which is based on the assumption of linear resistance costs. If quadratic or cubic costs are assumed, the isocost line becomes concave downward. Nevertheless, the optimum still occurs at the point of tangency between the isocost curve and the trade-off curve. In this case, the analysis of the net gain in efficiency would be based on the straight tangent line which goes through the socially optimum combination of A and R , rather than on the isocost curve itself. This is because the absolute value of the slope of that straight tangent line is given by the ratio of the marginal cost of thermal resistance (at the optimum point) to the social value of the energy saved.

A.2 AN ALGEBRAIC MEASURE OF ECONOMIC EFFICIENCY

An algebraic measure of the net gain in economic efficiency resulting from the use of RIF's can also be derived.⁴ This measure is based on the same concept underlying the geometric measure developed above. That is, the net gain in efficiency is equal to the amount by which the life-cycle heating-related cost under the privately optimum standard exceeds that under the socially optimum standard. The energy consumed under both standards is evaluated at its social value, i.e., the market price times the RIF.

Using the abbreviated notation of expression (4.2), for both standards, the life-cycle heating-related cost, adjusted for the social value of energy, can be represented as follows:

$$L = F \cdot K \cdot D \cdot (1/R) + a + b \cdot R. \quad (\text{A.4})$$

Thus, for the privately optimum standard life-cycle cost (L_o), expression (4.3) is substituted for R :

$$L_o = F \cdot K \cdot D [K \cdot D \cdot (1/b)]^{-1/2} + a + b \cdot [K \cdot D \cdot (1/b)]^{1/2}. \quad (\text{A.5})$$

Simplifying,

$$L_o = a + (1 + F) [K \cdot D \cdot b]^{1/2}. \quad (\text{A.6})$$

Similarly, for the socially optimum standard life-cycle cost (L_o^*), expression (4.5) is substituted for R :

$$L_o^* = F \cdot K \cdot D [F \cdot K \cdot D \cdot (1/b)]^{-1/2} + a + b \cdot [F \cdot K \cdot D \cdot (1/b)]^{1/2}. \quad (\text{A.7})$$

Simplifying,

$$L_o^* = [a + 2F^{1/2}] \cdot [K \cdot D \cdot b]^{1/2}. \quad (\text{A.8})$$

Now the net gain in economic efficiency is equal to the savings in life-cycle costs, as given by

$$L_o - L_o^* = [1 + F - 2F^{1/2}] \cdot [K \cdot D \cdot b]^{1/2}. \quad (\text{A.9})$$

It is interesting to note that in the case where the social and private values of energy are equal, we have $F=1$ and expression (A.9) reduces to zero, as expected. Moreover, it can also be shown that the net gain in efficiency is always positive, regardless of the RIF value used.⁵ This means that even if the social value of a resource is less than its market price (i.e. $\text{RIF} < 1$), a positive gain in economic efficiency would result from using the RIF in the development of the standard.

To get an idea of the order of magnitude of this net gain in economic efficiency, the following reasonable values are assumed for the parameters in expression (A.9):

$$\begin{aligned} K &= \text{UPW} \cdot 24 \cdot P_e \\ &= (13.65) \cdot (24) \cdot (4.5/1,000,000); \\ D &= 5000; \text{ and} \\ b &= 0.02. \end{aligned}$$

Under these assumptions, the net gain given by expression (A.9) becomes 0.0194 for a RIF value of 1.5 and 0.1897 for a RIF value of 2.9. This means that

⁴ The author is indebted to Dr. Douglas Shier for suggesting this algebraic measure of efficiency.

⁵ All the elements in the second set of brackets are positive. The first set of brackets can also be shown to be positive since $(1+F)^2 > 4F$ or $(1-F)^2 > 0$.

for each square foot of envelope area in a new building, the use of the RIF values of 1.5 and 2.9 would generate reductions in the present value life-cycle heating-related costs of 1.94 cents and 18.97 cents, respectively. Thus, for a typical single-family detached house with 3000 square feet of envelope area, the cost savings (or gains in economic efficiency) would be \$58.20 or \$569.10 for the two RIF values assumed.

Table A.1 CONVERSION FACTORS FROM CUSTOMARY TO METRIC (SI) UNITS

Physical Characteristic	To Convert From	To	Multiply by
Length	ft	m	3.048×10^{-1}
Area	ft ²	m ²	9.290×10^{-2}
Temperature	°F	°C	$t_C = (t_F - 32)/1.8$
Temperature difference	°F	°C	5.556×10^{-1}
Energy	Btu	J	1.055×10^3
U-value	Btu/hr·ft ² ·°F	W/m ² °C	5.678
Thermal Resistance	hr·ft ² ·°F/Btu	m ² °C/W	1.761×10^{-1}

U.S. DEPT. OF COMM. BIBLIOGRAPHIC DATA SHEET		1. PUBLICATION OR REPORT NO. NBS BSS 114	2. Gov't Accession No.	3. Recipient's Accession No.
4. TITLE AND SUBTITLE The Effect of "Resource Impact Factors" on Energy Conservation Standards for Buildings			5. Publication Date September 1978	
			6. Performing Organization Code	
7. AUTHOR(S) Stephen F. Weber			8. Performing Organ. Report No.	
9. PERFORMING ORGANIZATION NAME AND ADDRESS NATIONAL BUREAU OF STANDARDS DEPARTMENT OF COMMERCE WASHINGTON, D.C. 20234			10. Project/Task/Work Unit No.	
			11. Contract/Grant No.	
12. Sponsoring Organization Name and Complete Address (Street, City, State, ZIP) Department of Energy Washington, D.C. 20545			13. Type of Report & Period Covered Final	
			14. Sponsoring Agency Code	
15. SUPPLEMENTARY NOTES Library of Congress Catalog Card Number: 78-606072				
16. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.) This report addresses the question of the proper price for energy to be used in the development of optimum (i.e., cost-effective) energy conservation performance standards for buildings. This study finds that the appropriate price for energy is its social value, which should be determined through the development and application of Resource Impact Factors (RIF's). Some guidelines are provided for the formulation and development of RIF's. A life-cycle cost minimization model for determining the optimum conservation standard is employed to show how the use of RIF's would generally lower the maximum allowable energy consumption specified in the standard. Indeed, it is found that the higher the RIF value, the lower the energy consumption allowed by the standard, although this effect steadily diminishes as the RIF value increases. Moreover, the additional energy savings resulting from using RIF's are shown to increase as the severity of the climate increases. When two important restrictive assumptions of the model are relaxed, these same relationships between energy consumption and the RIF value on the one hand, and between the extra energy savings due to RIF's and the climate on the other hand, are both maintained. Finally, geometric and algebraic measures are derived for the net gain in economic efficiency that would result from using RIF's in developing energy conservation performance standards.				
17. KEY WORDS (six to twelve entries; alphabetical order; capitalize only the first letter of the first key word unless a proper name; separated by semicolons) Building economics; economics; economic efficiency; energy; energy conservation; life-cycle cost; optimization; performance standards; resources; resource impact factors; social optimum; standards				
18. AVAILABILITY ☒ Unlimited ☐ For Official Distribution. Do Not Release to NTIS ☒ Order From Sup. of Doc., U.S. Government Printing Office Washington, D.C. 20402, SD Stock No. SN003-003-01952-6 ☐ Order From National Technical Information Service (NTIS) Springfield, Virginia 22151		19. SECURITY CLASS (THIS REPORT) UNCLASSIFIED		21. NO. OF PAGES 55
		20. SECURITY CLASS (THIS PAGE) UNCLASSIFIED		22. Price \$2.30

Waste Heat Management Guidebook



A typical plant can save about 20 percent of its fuel—just by installing waste heat recovery equipment. But with so much equipment on the market, how do you decide what's right for you?

Find the answers to your problems in the *Waste Heat Management Guidebook*, a new handbook from the Commerce Department's National Bureau of Standards and the Federal Energy Administration.

The *Waste Heat Management Guidebook* is designed to help you, the cost-conscious engineer or manager, learn how to capture and recycle heat that is normally lost to the environment during industrial and commercial processes.

The heart of the guidebook is 14 case studies of companies that have recently installed waste heat recovery systems and profited. One of these applications may be right for you, but even if it doesn't fit exactly, you'll find helpful approaches to solving many waste heat recovery problems.

In addition to case studies, the guidebook contains information on:

- sources and uses of waste heat
- determining waste heat requirements
- economics of waste heat recovery
- commercial options in waste heat recovery equipment
- instrumentation
- engineering data for waste heat recovery
- assistance for designing and installing waste heat systems

To order your copy of the *Waste Heat Management Guidebook*, send \$2.75 per copy (check or money order) to Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402. A discount of 25 percent is given on orders of 100 copies or more mailed to one address.

The *Waste Heat Management Guidebook* is part of the EPIC industrial energy management program aimed at helping industry and commerce adjust to the increased cost and shortage of energy.

There's
a new
look
to...

DIMENSIONS

... the monthly magazine of the National Bureau of Standards. Still featured are special articles of general interest on current topics such as consumer product safety and building technology. In addition, new sections are designed to ... **PROVIDE SCIENTISTS** with illustrated discussions of recent technical developments and work in progress ... **INFORM INDUSTRIAL MANAGERS** of technology transfer activities in Federal and private labs. ... **DESCRIBE TO MANUFACTURERS** advances in the field of voluntary and mandatory standards. The new **DIMENSIONS/NBS** also carries complete listings of upcoming conferences to be held at NBS and reports on all the latest NBS publications, with information on how to order. Finally, each issue carries a page of News Briefs, aimed at keeping scientist and consumer alike up to date on major developments at the Nation's physical sciences and measurement laboratory.

(please detach here)

SUBSCRIPTION ORDER FORM

Enter my Subscription To DIMENSIONS/NBS at \$12.50. Add \$3.15 for foreign mailing. No additional postage is required for mailing within the United States or its possessions. Domestic remittances should be made either by postal money order, express money order, or check. Foreign remittances should be made either by international money order, draft on an American bank, or by UNESCO coupons.

☐ Remittance Enclosed
(Make checks payable
to Superintendent of
Documents)

☐ Charge to my Deposit
Account No.

Send Subscription to:

NAME-FIRST, LAST																							
COMPANY NAME OR ADDITIONAL ADDRESS LINE																							
STREET ADDRESS																							
CITY												STATE				ZIP CODE							

PLEASE PRINT

MAIL ORDER FORM TO:
Superintendent of Documents
Government Printing Office
Washington, D.C. 20402

**Announcement of New Publications
of the
National Bureau of Standards**

Superintendent of Documents,
Government Printing Office,
Washington, D. C. 20402

Dear Sir:

Please add my name to the announcement list of new
publications as issued by the National Bureau of Standards.

Name.....

Company.....

Address.....

City..... State..... Zip Code.....

(Notification Key N519)

(cut here)

NBS TECHNICAL PUBLICATIONS

PERIODICALS

JOURNAL OF RESEARCH—The Journal of Research of the National Bureau of Standards reports NBS research and development in those disciplines of the physical and engineering sciences in which the Bureau is active. These include physics, chemistry, engineering, mathematics, and computer sciences. Papers cover a broad range of subjects, with major emphasis on measurement methodology, and the basic technology underlying standardization. Also included from time to time are survey articles on topics closely related to the Bureau's technical and scientific programs. As a special service to subscribers each issue contains complete citations to all recent NBS publications in NBS and non-NBS media. Issued six times a year. Annual subscription: domestic \$17.00; foreign \$21.25. Single copy, \$3.00 domestic; \$3.75 foreign.

Note: The Journal was formerly published in two sections: Section A "Physics and Chemistry" and Section B "Mathematical Sciences."

DIMENSIONS/NBS

This monthly magazine is published to inform scientists, engineers, businessmen, industry, teachers, students, and consumers of the latest advances in science and technology, with primary emphasis on the work at NBS. The magazine highlights and reviews such issues as energy research, fire protection, building technology, metric conversion, pollution abatement, health and safety, and consumer product performance. In addition, it reports the results of Bureau programs in measurement standards and techniques, properties of matter and materials, engineering standards and services, instrumentation, and automatic data processing.

Annual subscription: Domestic, \$11.00; Foreign \$13.75

NONPERIODICALS

Monographs—Major contributions to the technical literature on various subjects related to the Bureau's scientific and technical activities.

Handbooks—Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

Special Publications—Include proceedings of conferences sponsored by NBS, NBS annual reports, and other special publications appropriate to this grouping such as wall charts, pocket cards, and bibliographies.

Applied Mathematics Series—Mathematical tables, manuals, and studies of special interest to physicists, engineers, chemists, biologists, mathematicians, computer programmers, and others engaged in scientific and technical work.

National Standard Reference Data Series—Provides quantitative data on the physical and chemical properties of materials, compiled from the world's literature and critically evaluated. Developed under a world-wide program coordinated by NBS. Program under authority of National Standard Data Act (Public Law 90-396).

NOTE: At present the principal publication outlet for these data is the Journal of Physical and Chemical Reference Data (JPCRD) published quarterly for NBS by the American Chemical Society (ACS) and the American Institute of Physics (AIP). Subscriptions, reprints, and supplements available from ACS, 1155 Sixteenth St. N.W., Wash., D.C. 20056.

Building Science Series—Disseminates technical information developed at the Bureau on building materials, components, systems, and whole structures. The series presents research results, test methods, and performance criteria related to the structural and environmental functions and the durability and safety characteristics of building elements and systems.

Technical Notes—Studies or reports which are complete in themselves but restrictive in their treatment of a subject. Analogous to monographs but not so comprehensive in scope or definitive in treatment of the subject area. Often serve as a vehicle for final reports of work performed at NBS under the sponsorship of other government agencies.

Voluntary Product Standards—Developed under procedures published by the Department of Commerce in Part 10, Title 15, of the Code of Federal Regulations. The purpose of the standards is to establish nationally recognized requirements for products, and to provide all concerned interests with a basis for common understanding of the characteristics of the products. NBS administers this program as a supplement to the activities of the private sector standardizing organizations.

Consumer Information Series—Practical information, based on NBS research and experience, covering areas of interest to the consumer. Easily understandable language and illustrations provide useful background knowledge for shopping in today's technological marketplace.

Order above NBS publications from: Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.

Order following NBS publications—NBSIR's and FIPS from the National Technical Information Services, Springfield, Va. 22161.

Federal Information Processing Standards Publications (FIPS PUB)—Publications in this series collectively constitute the Federal Information Processing Standards Register. Register serves as the official source of information in the Federal Government regarding standards issued by NBS pursuant to the Federal Property and Administrative Services Act of 1949 as amended, Public Law 89-306 (79 Stat. 1127), and as implemented by Executive Order 11717 (38 FR 12315, dated May 11, 1973) and Part 6 of Title 15 CFR (Code of Federal Regulations).

NBS Interagency Reports (NBSIR)—A special series of interim or final reports on work performed by NBS for outside sponsors (both government and non-government). In general, initial distribution is handled by the sponsor; public distribution is by the National Technical Information Services (Springfield, Va. 22161) in paper copy or microfiche form.

BIBLIOGRAPHIC SUBSCRIPTION SERVICES

The following current-awareness and literature-survey bibliographies are issued periodically by the Bureau:

Cryogenic Data Center Current Awareness Service. A literature survey issued biweekly. Annual subscription: Domestic, \$25.00; Foreign, \$30.00.

Liquefied Natural Gas. A literature survey issued quarterly. Annual subscription: \$20.00.

Superconducting Devices and Materials. A literature survey issued quarterly. Annual subscription: \$30.00. Send subscription orders and remittances for the preceding bibliographic services to National Bureau of Standards, Cryogenic Data Center (275.02) Boulder, Colorado 80302.

U.S. DEPARTMENT OF COMMERCE
National Bureau of Standards
Washington, D.C. 20234

OFFICIAL BUSINESS

Penalty for Private Use, \$300

POSTAGE AND FEES PAID
U.S. DEPARTMENT OF COMMERCE
COM-215



SPECIAL FOURTH-CLASS RATE
BOOK
